



NOTE: ALL MATERIAL MUST COMPLIANT RoHS STANDARD


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN

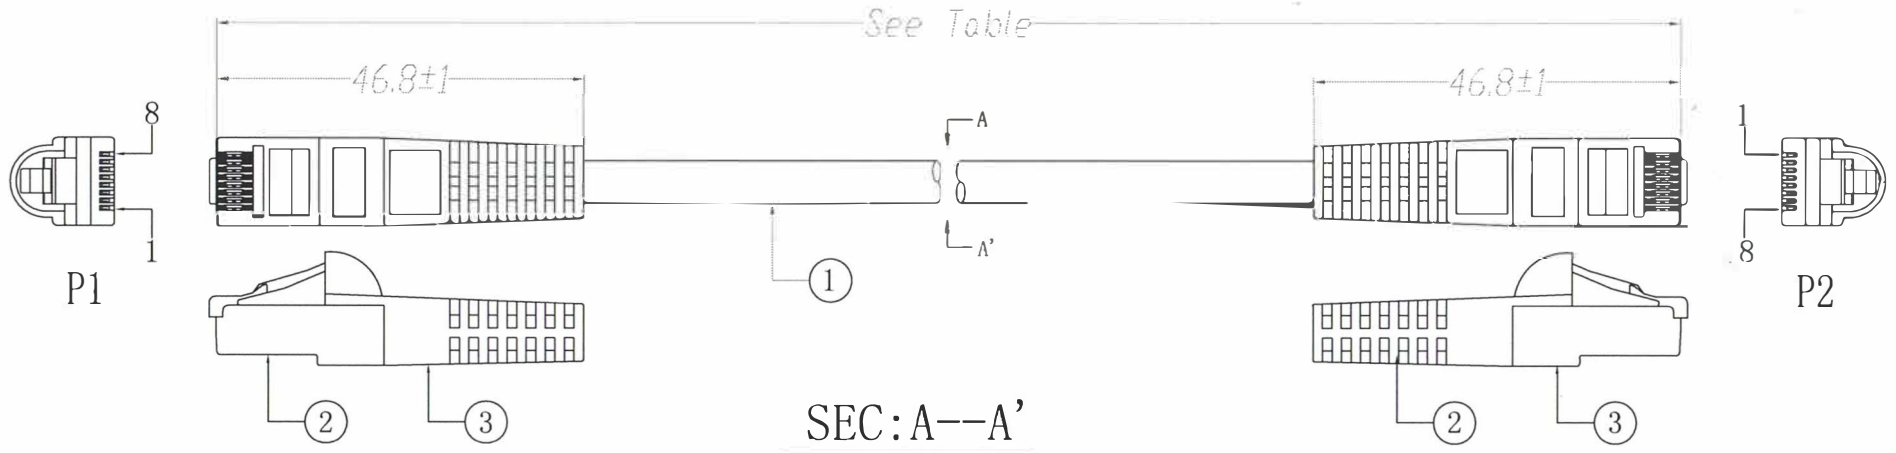

SEC: A--A'



WIRING

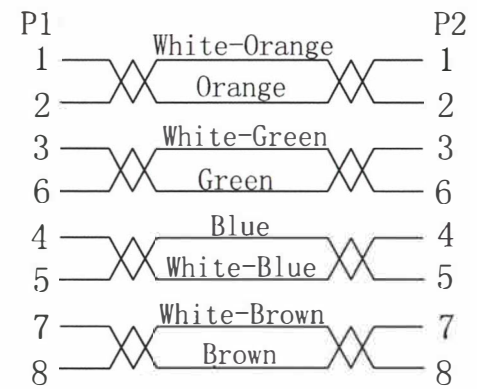

ELECTRICAL TEST:

- 1) 100% Open Short & Miss Wire Test.
- 2) Insulation impedance: 20MΩ MIN (300DC/0.01s).
- 3) Conduction impedance: 3Ω MAX.

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QTY	UN.
③	Molding	60P PVC, Colour(Pantone NO.:2925C Blue)	13	g
②	8P8C PLUG	8P8C PLUG Pin Gold Plated	2	pcs
①	Cable	CAT6 UTP[(7/0.19BC)*4P+Filler(Cross skeleton)] Jacket:PVC OD6.0 H70° 2925C Blue Marking: CAT6 UTP TYPE CM 24AWG NETWORK CABLE +METER		mm

**American Cable Assemblies**

Drawing NO. 图号: 943-0083	Revision 版次: A-0
Title 品名: CAT6 UTP CABLE 2925C Blue	
Customer 客户号: XLM61	Customer P/N 客户料号: See Table
Item NO.:	
Date 日期: 2016.06.01	Tolerance 公差: .XX(0.01)
Units 单位: mm	3DR
	Page 页数: 1/1