


PowerWise® 1G 4PPoE

OSP Unshielded

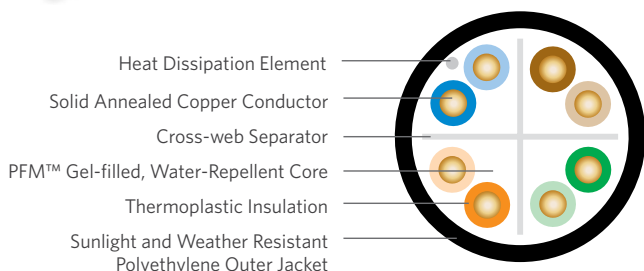

SPECIFICATIONS

Pair Count	4
Conductor	Solid annealed copper
AWG (mm)	22 (0.64)
Insulation	Polyolefin
Separator	Polyolefin cross-web
Jacket	Black, sunlight and weather resistant polyethylene
Characteristic Impedance Ohms	100 ± 15
Nominal Velocity of Propagation %	66
Performance Compliance	ANSI/TIA-568.2-D ANSI/ICEA S-107-704-2012 RoHS-compliant/RoHS 2-compliant REACH-compliant

ENVIRONMENTAL SPECIFICATIONS AND TESTS

Operation	-40°F to +167°F (-40°C to +75°C)
Installation	-40°F to +140°F (-40°C to +60°C)
ANSI/ICEA S-100-685-2009 Tested down to -67°F (-55°C)	Section 7.1: -4°F (-20°C) cold bend test Section 7.2: +14°F (-10°C) cold impact test Section 7.3: -40°F (-40°C) anvil test



TECHNICAL GUIDELINE

Special connectivity is required for these cable designs. Refer to the "Resources" section on our site for the Technical Guideline, "OSP Broadband Installation Guidelines," for more information.



CAUTIONARY INFORMATION

- For distance and warranty information please refer to warranty and tech guide documents

PRODUCT DESCRIPTION

PowerWise® 1G 4PPoE cables provide the best performance and overall value for 4 Pair Power over Ethernet (4PPoE) applications requiring up to 100W of power and up to 1 Gigabit Ethernet performance. PowerWise 1G 4PPoE cables are specifically designed to mitigate temperature build-up offer exceptional energy efficiency and ensure performance (up to 1 Gigabit Ethernet) over the lifetime of your system. Cable temperature increases are reduced and power efficiency is increased as a result of 22 gauge conductors and the heat dissipation element.

PowerWise 1G 4PPoE cables are the best solution to connect and power your 4PPoE and extended distance applications compared to standard category cable designs.

PowerWise® 1G 4PPoE OSP Unshielded is a robust category cable designed to provide an extension of the LAN beyond the premises or in situations where the NEC code requires an OSP-rated cable when it is in contact with earth, whether in a conduit or not. The cable consists of a core of four (4) balanced twisted pairs surrounded by Superior Essex PFM™ gel that does not drip or flow, even in cell tower applications at elevated temperatures. The core is jacketed with a sunlight and abrasion resistant black, polyethylene outer jacket. This unshielded design is suitable for the following deployments: duct, underground conduit and tower.

APPLICATIONS

- 10BASE-T through 1000BASE-T Ethernet
- Power over Ethernet (PoE) - IEEE 802.3bt Type 1 to 4
- ATM and token ring
- HDBaseT Class A and B

FEATURES

- Tested 350 MHz
- Unshielded
- PFM gel-filled core construction
- OSP-grade black polyethylene jacket
- ColorTip® circuit identification system
- Tested in most severe temperature conditions in bundle of 100 cables
- Heat dissipation element
- Ideal for extended distance over 100m

BENEFITS

- Assures ample overhead for reliable transmission in an OSP-rated cable allowing extension of the premises LAN
- Small, robust design
- Prevents intrusion of and easily wipes clean during installation
- Outside plant rated cable for years of reliable performance
- Easily identifiable conductor mates even in low-light environments
- AWG 22 insulated wire offers 88% power efficiency and lowest temperature increase inside a bundle, the best of its class
- Mitigate the heat to same level along the whole distance of the link for improved bandwidth performances
- Guaranteed distance for different applications based on BER test performed by UL at UL facility

PART NUMBERS AND PHYSICAL CHARACTERISTICS

Part Number	Product Type	Nominal Diameter in (mm)	Approx. Weight lbs/kft (kg/km)	Package
PW04-401-58	UTP	0.31 (7.9)	41 (61)	1,000' reel

Additional part numbers, constructions and packaging available upon request.



800.551.8948
SuperiorEssexCommunications.com

All information, content, data, specifications, packaging and part numbers detailed herein are subject to change. For the most up-to-date information, please visit SuperiorEssexCommunications.com. Purchase of this product is subject exclusively to the then current Superior Essex International LP Terms and Conditions of Sale for Communications Cable, Wire and Connectivity Products, which can be found on our website, SuperiorEssexCommunications.com, or provided to you upon request.

Rev 02/22
Ed 14.1