


8 7 6 5 4 3 2 1


D

D

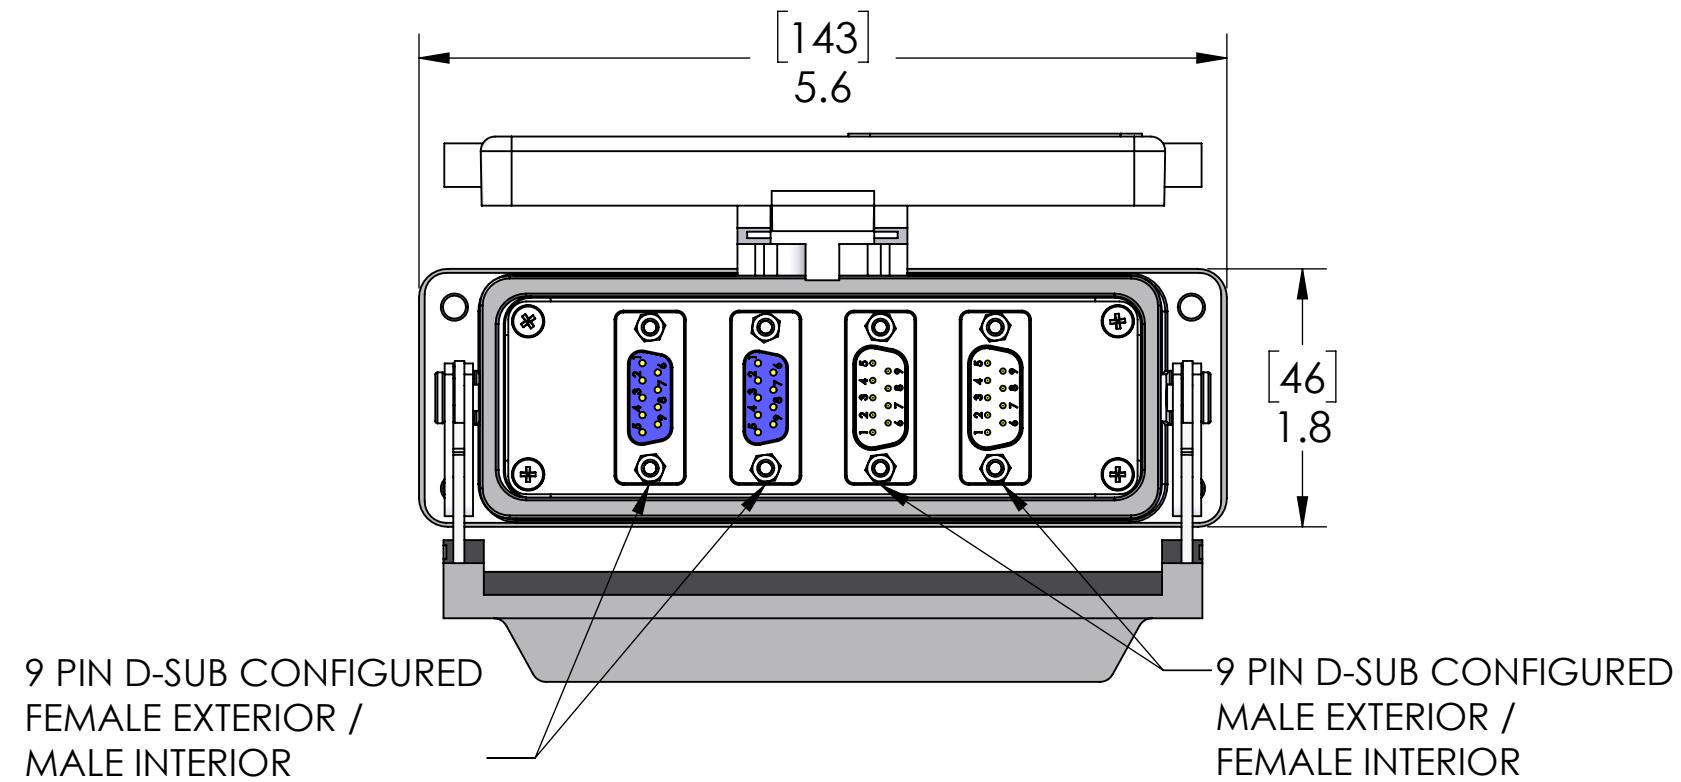

9 PIN D-SUB CONFIGURED
FEMALE EXTERIOR /
MALE INTERIOR

9 PIN D-SUB CONFIGURED
MALE EXTERIOR /
FEMALE INTERIOR

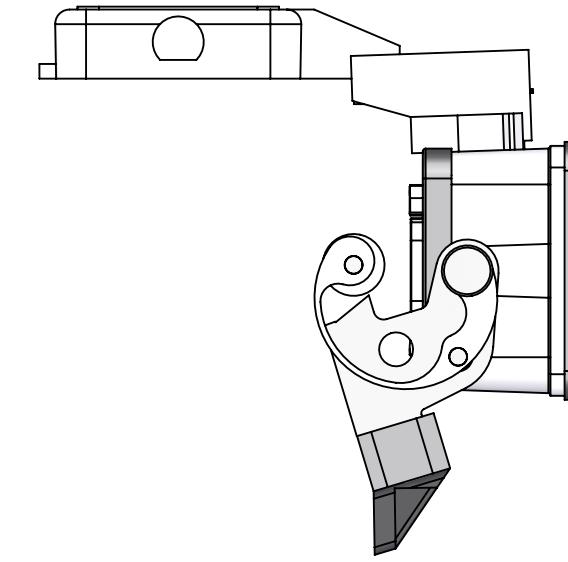

PANEL CUTOUT

[112] 4.4 [5] $\odot .2$
4X

[35] 1.4 [32] 1.3



OPERATING TEMPERATURE: (-55°C / +105°C (-67°F / +221°F))

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS	
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)

MOUNTING SCREW TORQUE: 1.2~1.8N·m (0.9~1.3 Lb·Ft)

MENCOM CORPORATION

TITLE:

DB9 X 2; 2MDB9; 24

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	07/13/2021
	CHECKED BY	DCG
	CHECK DATE	07/16/2021

SIZE	DWG. NO.	REV
B	DB09-2-2MDB9-24LS	C
SCALE: 3:4	WEIGHT:	SHEET 1 OF 1

8 7 6 5 4 3 2 1

A

A

A

1