


DB9 CONFIGURED
FEMALE EXTERIOR / MALE INTERIOR
DB9 CONFIGURED
MALE EXTERIOR / FEMALE INTERIOR


BLANKING PLUG TO
COVER DB9 HOLE

PANEL CUTOUT

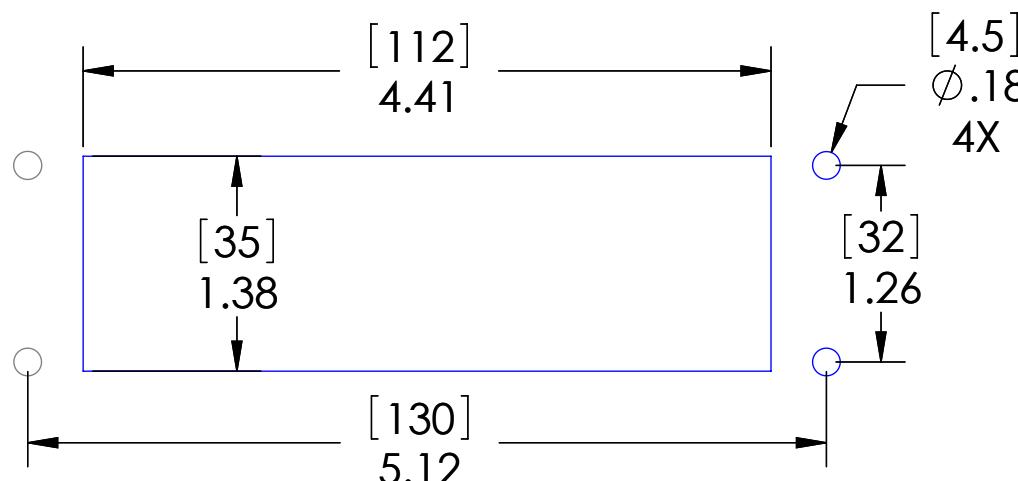

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

OPERATING TEMPERATURE: (-10°C / +60°C (+14°F / +140°F))		These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.	
MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT P/N: D-PIC-MT	BODY: EPOXY COATED DIE CAST ALUMINUM GASKET: THERMOPLASTIC ELASTOMER HANDLE: POLYAMIDE LEVERS: STAINLESS STEEL	PIC RATINGS/SPECIFICATIONS NEMA/UL EN 60529: MOUNTING SCREW SIZE: MOUNTING SCREW TORQUE:	4, 4X, 12 IP65 M4 (8-32) (304 or 316SS for 4X) 1.2~1.8N·m (0.9~1.3 Lb·Ft)
UNLESS OTHERWISE SPECIFIED:	DRAWN BY DG DRAWN DATE 07/14/2021	Comments:	MENCOM CORPORATION
DIMENSIONS ARE IN INCHES AND [MM]	CHECKED BY DCG CHECK DATE 07/16/2021		TITLE: DB9; MDB9; RJ45; 24



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

SIZE	DWG. NO.	REV
B	DB09-MDB9-RJ45-24	B
SCALE: 13:16	WEIGHT:	SHEET 1 OF 1