
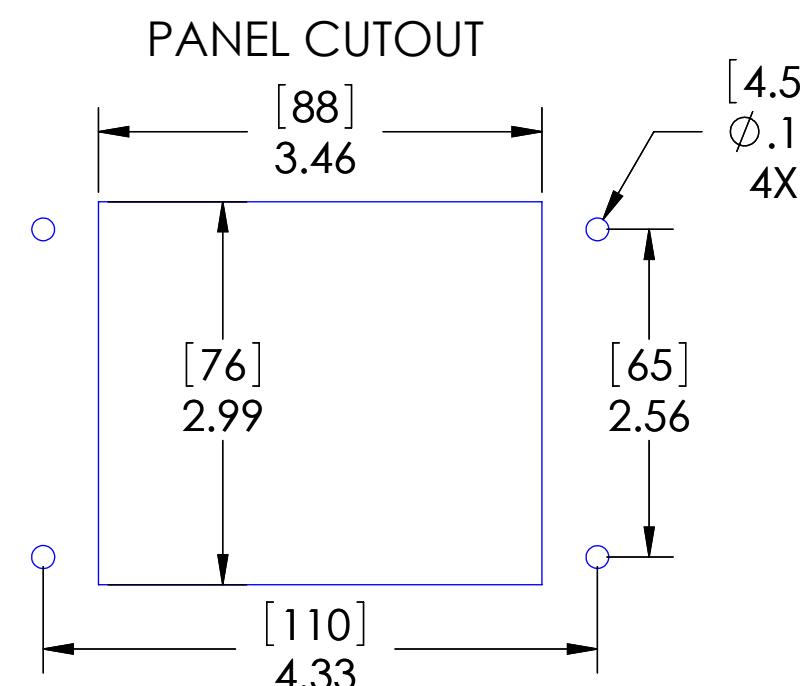
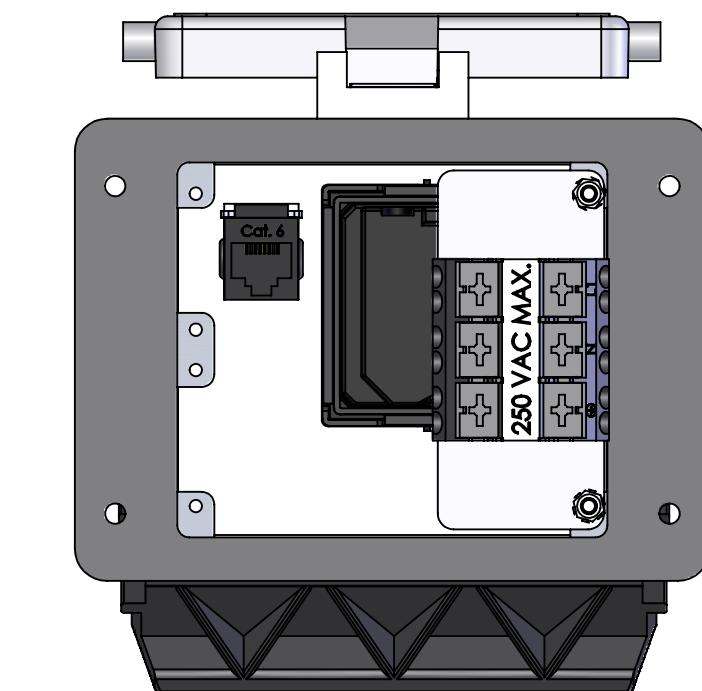


CHINA 10 AMPERE-250 VOLT, GB 1002, GB 2099
(CH1-10R) MODULAR OUTLET, TYPE I, 45mmX45mm SIZE,
SNAP-IN MOUNTING, SHUTTERED CONTACTS,
2 POLE-3 WIRE GROUNDING (2P+E)

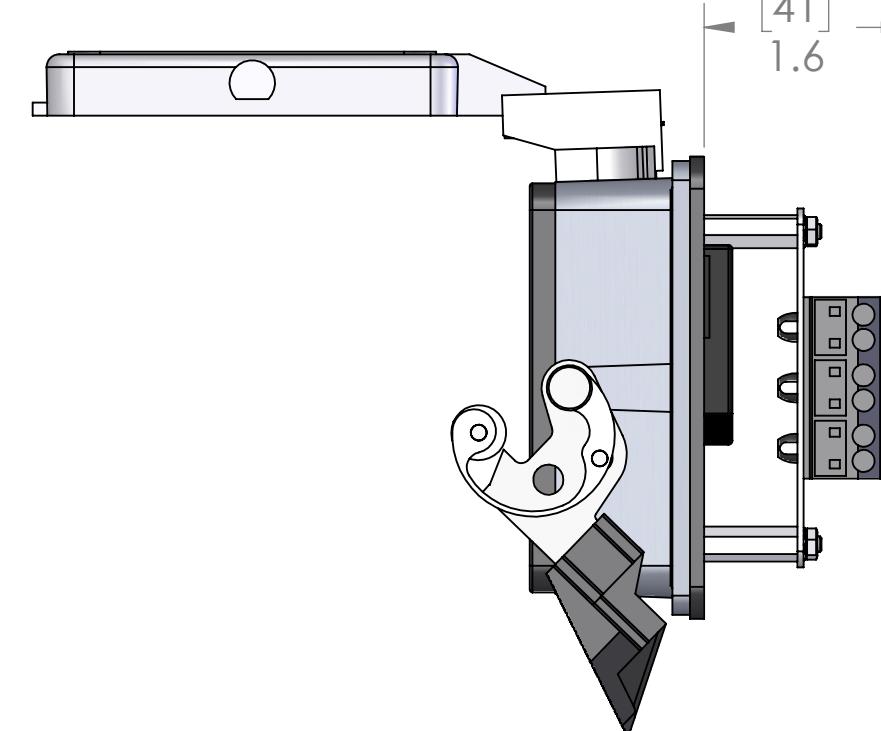

OPERATING TEMPERATURE: (-5°C / +50°C (+23°F / +122°F))

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]

DRAWN BY DCG
DRAWN DATE 09/06/2024
CHECKED BY RP
CHECK DATE 09/06/2024

MATERIAL
FINISH

DO NOT SCALE DRAWING

MENCOM CORPORATION

TITLE:
CHI 10A RCP; RJ; 32

SIZE DWG. NO.
B DCH1-RJ45-32
REV **H**
SCALE: 2:3 WEIGHT:
SHEET 1 OF 1

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK