


INDIA 16A/6A-230V RECEPTACLE  
SHUTTERED CONTACTS, 2 POLE 3 WIRE  
GOUNDING, LIMITED TO 3A  
BY RESET

### PANEL CUTOUT

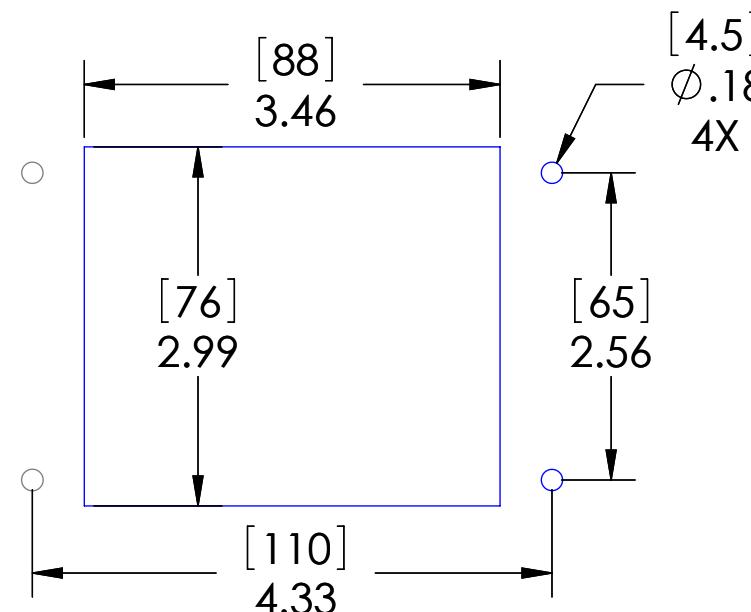

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED

CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK

OPERATING TEMPERATURE: (-5°C / +50°C (+23°F / +122°F))

MOUNTING KIT ORDERED  
SEPARATELY CONTAINS  
M4x0.7 SS SCREW, NYLON WASHER,  
SPLIT LOCKWASHER AND M4 NUT  
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST
	ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

UNLESS OTHERWISE SPECIFIED: DRAWN BY DCG  
DIMENSIONS ARE IN INCHES AND [MM] DRAWN DATE 08/05/2019

CHECKED BY ADM CHECK DATE 08/05/2019

REVISIONS: 1

COMMENTS: MATERIAL

FINISH

DO NOT SCALE DRAWING

MENCOM CORPORATION

TITLE: UNIV INDIA RCPT; RJ45; 3A; 32

SIZE DWG. NO. REV  
B DIN-RJ45-R-32 D  
SCALE: 5:8 WEIGHT: SHEET 1 OF 1