


8 7 6 5 4 3 2 1

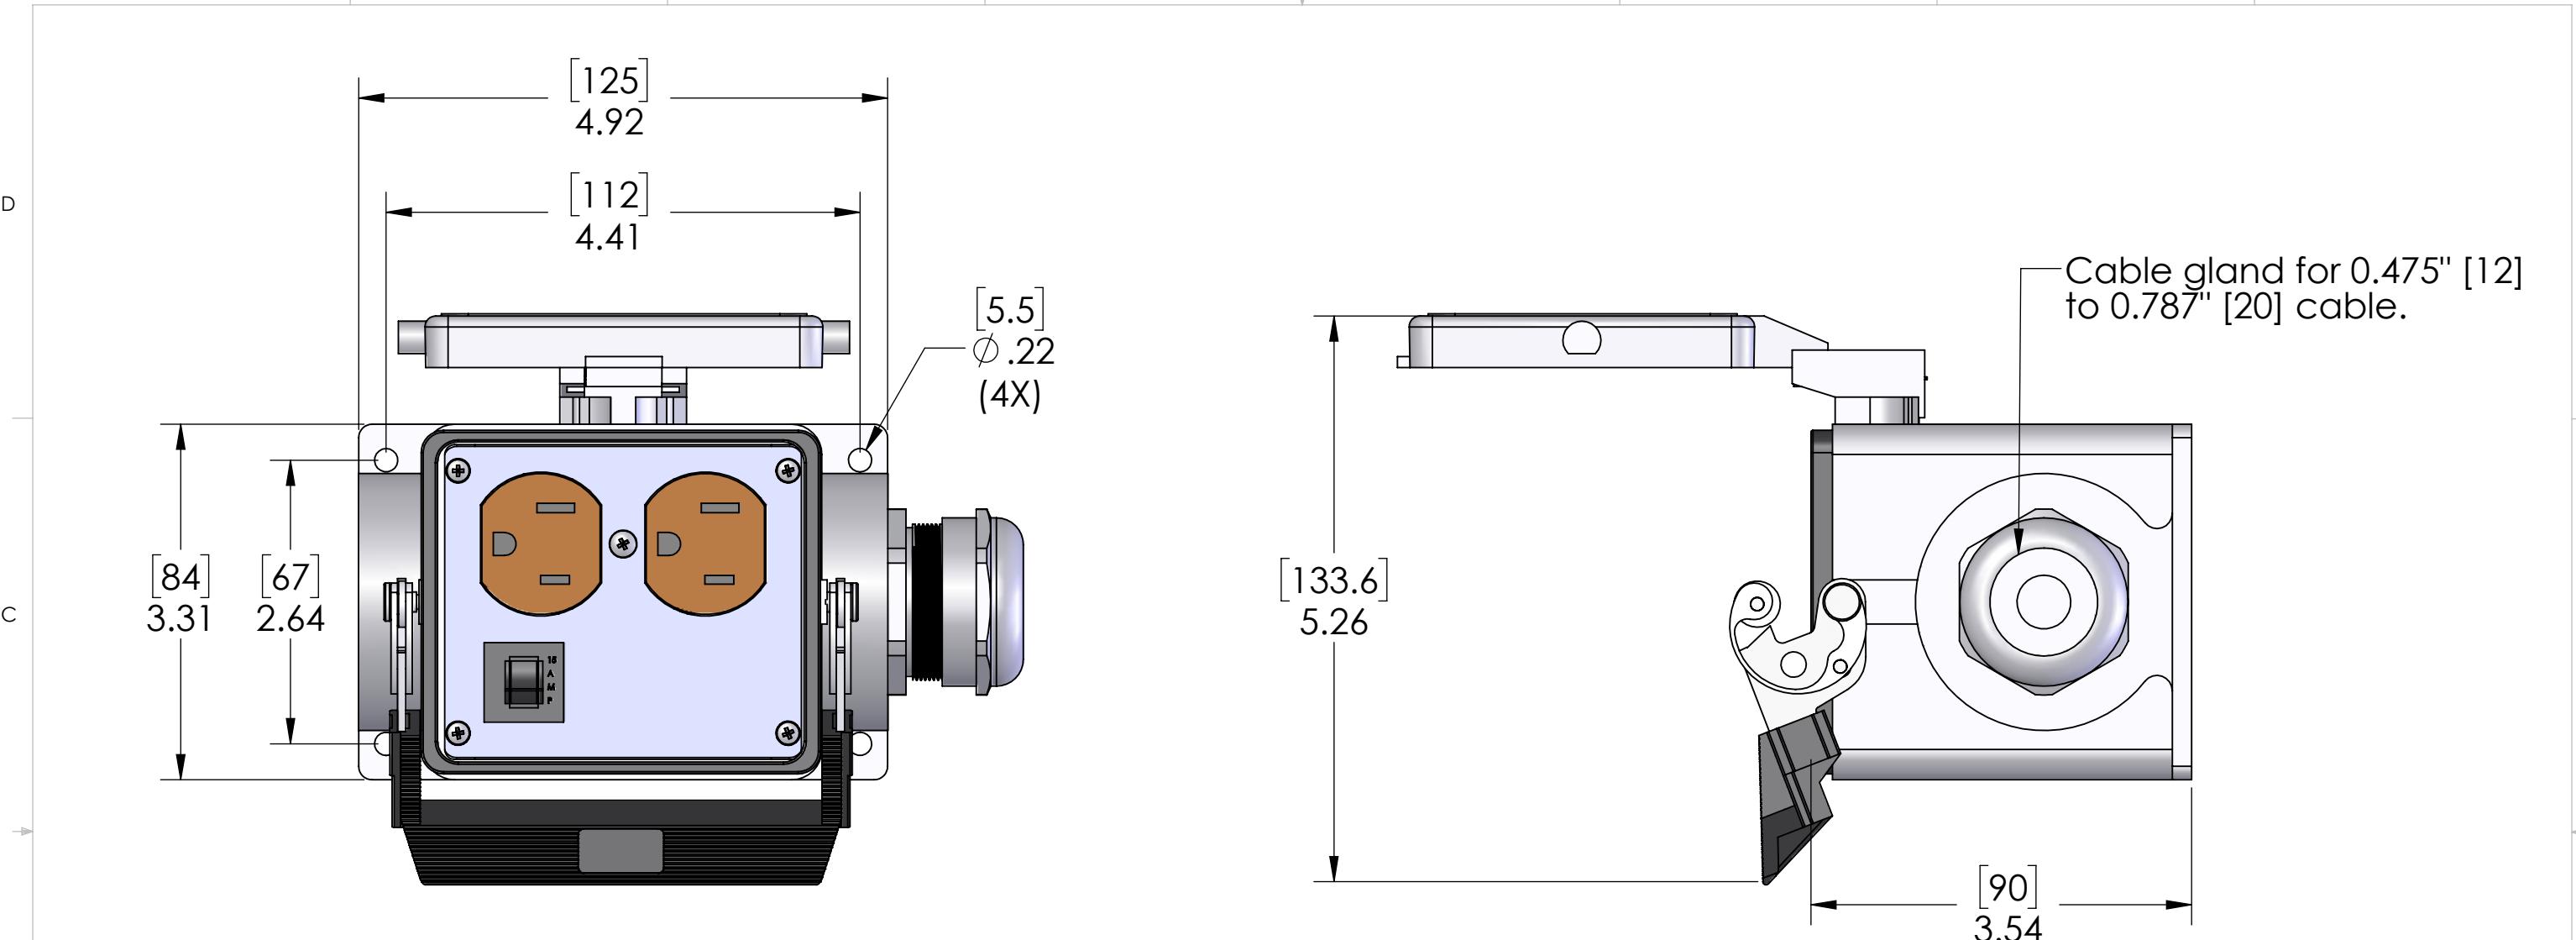

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS

HOUSING MATERIALS	VOLTS:	125V
BODY: EPOXY COATED DIE CAST ALUMINUM	AMPS	15A
GASKET: THERMOPLASTIC ELASTOMER	SCCR:	0.2kA
HANDLE: POLYAMIDE	NEMA/UL EN 60529:	4, 4X, 12 IP65
LEVERS: STAINLESS STEEL	MOUNTING SCREW SIZE:	M5 (10-32) (304 or 316SS for 4X)
	MOUNTING SCREW TORQUE:	1.2~1.8N·m (0.9~1.3 Lb·Ft)

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M5x0.8 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M5 NUT
P/N: D-PIC-MT-M5



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	DG
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	04/15/2019
	CHECKED BY	
	CHECK DATE	
COMMENTS:		

MENCOM CORPORATION

TITLE:
DPLX; 15 AMP; SURF MOUNT

SIZE DWG. NO. REV
B DP-15R-P32 **A**
SCALE: 2:3 WEIGHT: SHEET 1 OF 1