


PANEL CUTOUT

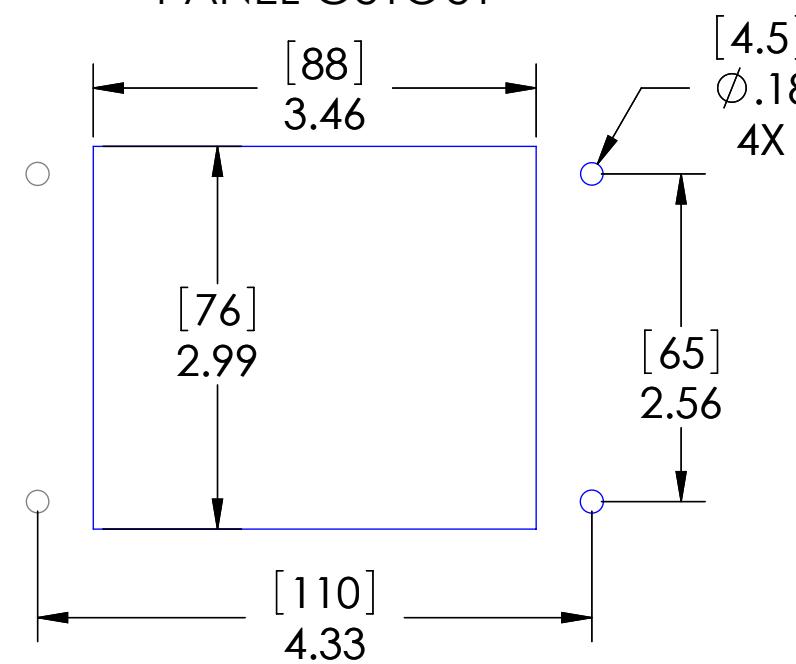

| STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED | | |
|--|----------|----------|
| CONN. TYPE | EXTERIOR | INTERIOR |
| BNC | JACK | JACK |

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: ±1/64
ANGULAR: MACH 5° BEND ±5°
TWO PLACE DECIMAL ±.01
THREE PLACE DECIMAL ±.004

MATERIAL
FINISH
DO NOT SCALE DRAWING

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

| PIC RATINGS/SPECIFICATIONS | |
|----------------------------|---------------------------------|
| VOLTS: | 125V |
| AMPS: | 3A |
| SCCR: | 0.2kA |
| NEMA/UL EN 60529: | 4, 4X, 12 IP65 |
| MOUNTING SCREW SIZE: | M4 (8-32) (304 or 316SS for 4X) |
| MOUNTING SCREW TORQUE: | 1.2~1.8N-m (0.9~1.3 Lb-Ft) |
| INCOMING POWER WIRE SIZE: | 0.5 ~ 4.0 sq mm / 20-12AWG |
| WIRE STRIP LENGTH: | 10 ~ 11 mm |

MENCOM CORPORATION

TITLE:

DP-BNC-R-32

SIZE DWG. NO. REV
B DP-BNC-R-32 D
SCALE: 2:3 WEIGHT: SHEET 1 OF 1