


8 7 6 5 4 3 2 1

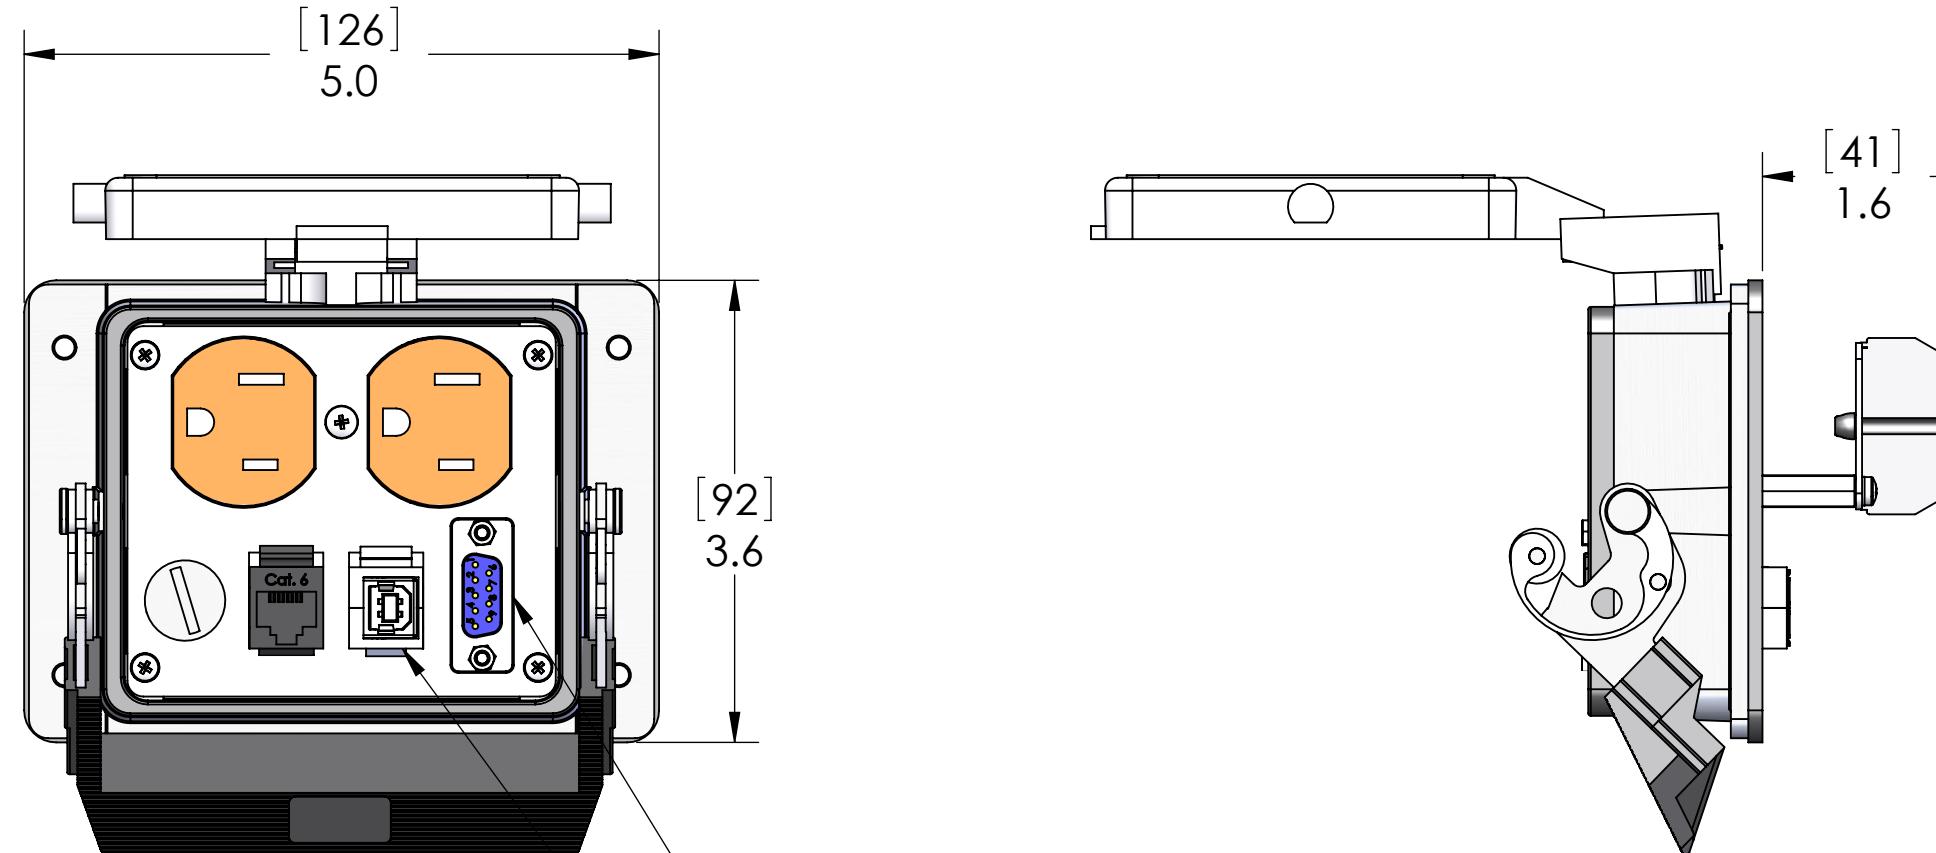


9 PIN D-SUB CONFIGURED
FEMALE EXTERIOR /
MALE INTERIOR
USB TYPE B FEMALE (EXTERIOR)
TO TYPE A FEMALE (INTERIOR)

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PANEL CUTOUT

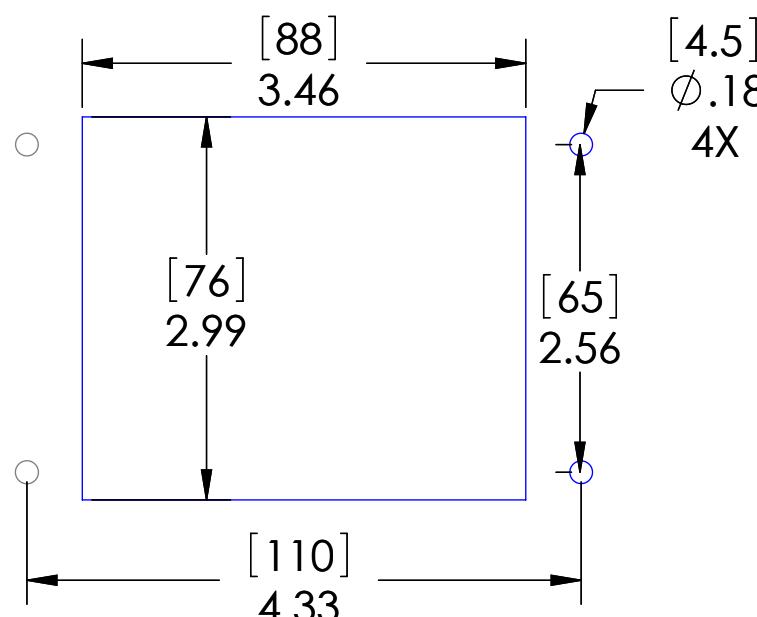

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT6 JACK	CAT6 JACK

OPERATING TEMPERATURE: (-10°C / +60°C (+14°F / +140°F))

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	DCG	MATERIAL	COMMENTS:
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	07/12/2021		
	CHECKED BY	DCG		
	CHECK DATE	07/13/2021		
SIZE	DWG. NO.			
B	DP-DB9-RJ45-USB-BFAF-32			REV D
SCALE: 2:3	WEIGHT:			SHEET 1 OF 1

MENCOM CORPORATION

TITLE:
DPLX;DB9;RJ;USB BFAF-PM;32