


## PANEL CUTOUT



MOUNTING KIT ORDERED  
SEPARATELY CONTAINS  
M4x0.7 SS SCREW, NYLON WASHER  
SPLIT LOCKWASHER AND M4 NUT  
**P/N: D-PIC-MT**

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

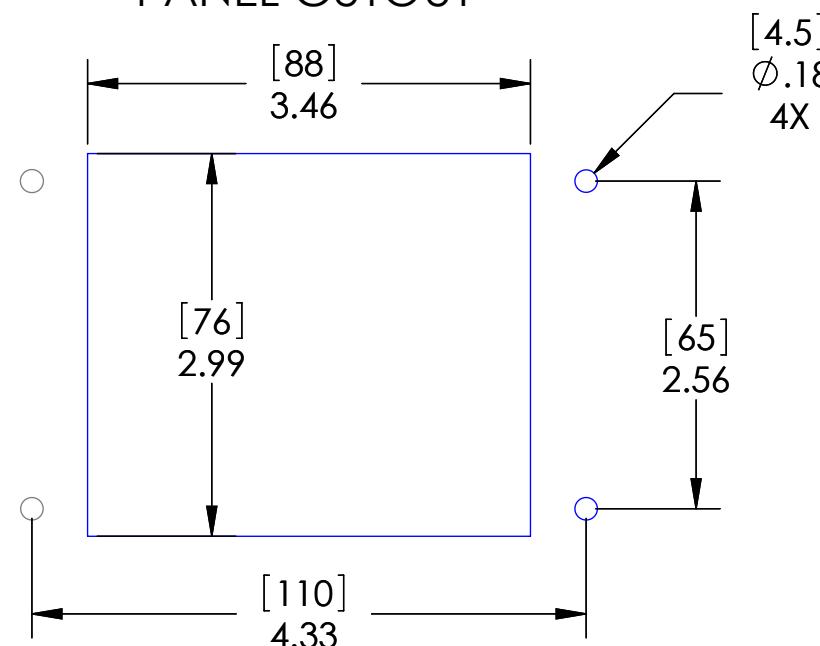

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOME
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

## **PIC RATINGS/SPECIFICATIONS**

	VOLTS:	125V
	AMPS:	3A
	SCCR:	0.2kA
	NEMA/UL   EN 60529:	4, 4X, 12   IP65
	MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
R	MOUNTING SCREW TORQUE:	1.2~1.8N·m (0.9~1.3 Lb·Ft)
	INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
	WIRE STRIP LENGTH:	10 ~ 11 mm

## MENCOM CORPORATION

LE: DPLX; DDB15; BNC; 3A; 32

SIZE <b>B</b>	DWG. NO. DP-DDB15-BNC-R-32	REV <b>C</b>
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
BNC	JACK	JACK