


15 PIN D-SUB CONFIGURED  
FEMALE EXTERIOR/ MALE INTERIOR  
9 PIN D-SUB CONFIGURED  
MALE EXTERIOR/ FEMALE INTERIOR

### PANEL CUTOUT

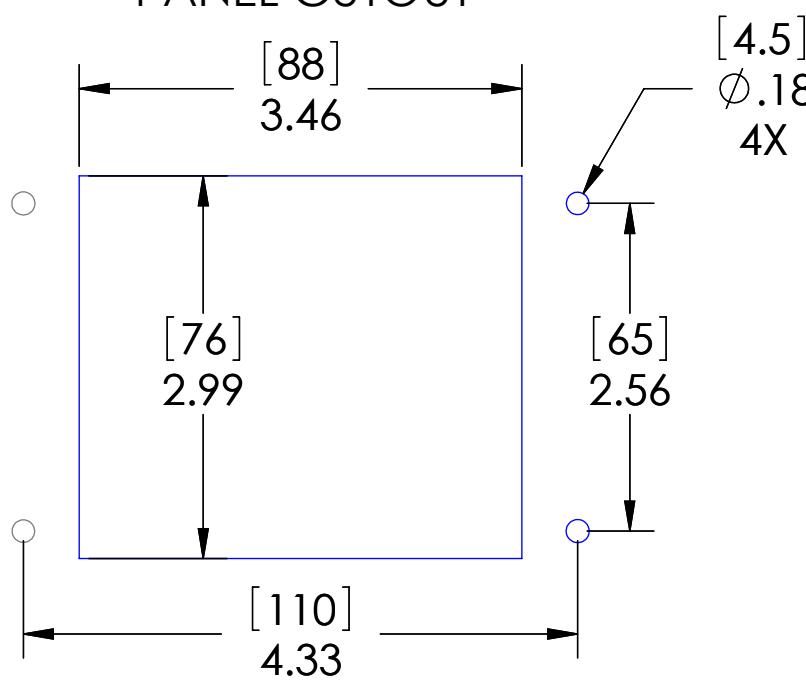

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

OPERATING TEMPERATURE: (-20°C / +60°C (-4°F / +140°F))

MOUNTING KIT ORDERED  
SEPARATELY CONTAINS  
M4x0.7 SS SCREW, NYLON WASHER,  
SPLIT LOCKWASHER AND M4 NUT  
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.



LISTED  
ENCL. ACC.  
5JR2

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MM]

DRAWN BY DCG  
DRAWN DATE 07/12/2021  
CHECKED BY DCG  
CHECK DATE 07/13/2021

MATERIAL

FINISH

DO NOT SCALE DRAWING

MENCOM CORPORATION

TITLE:  
DP, MDB9, DB15; 3A; SZ 32

SIZE DWG. NO.  
**B** DP-MDB9-DB15-R-32

REV **D**

SCALE: 2:3 WEIGHT:

SHEET 1 OF 1