


USB CONNECTOR CONFIGURED
FEMALE TYPE B EXTERIOR
FEMALE TYPE A INTERIOR

SHEILDDED RJ45 CONNECTOR
CONFIGURED JACK TO JACK

PANEL CUTOUT

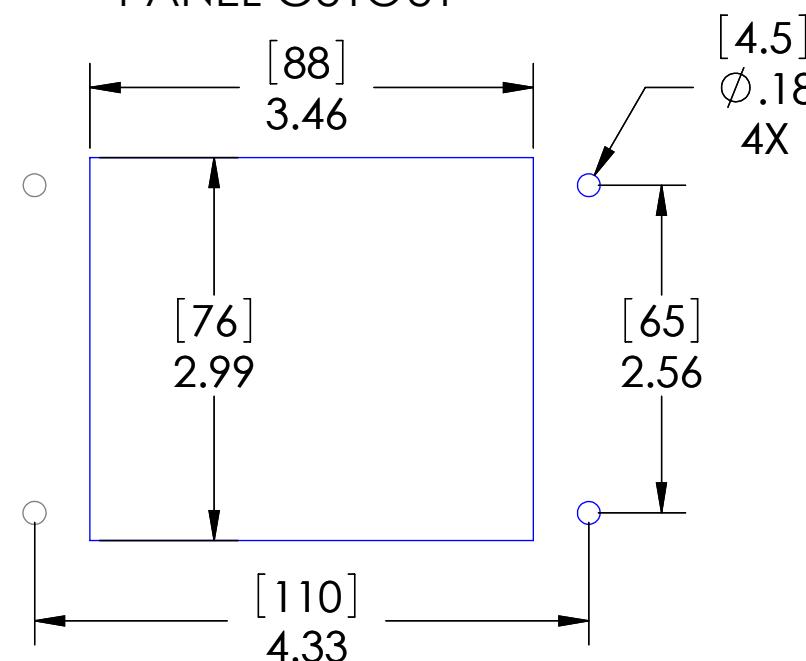

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

| HOUSING MATERIALS | |
|-------------------|-----------------------------------|
| BODY: | EPOXY COATED DIE CAST ALUMINUM |
| GASKET: | THERMOPLASTIC ELASTOMER |
| HANDLE: | POLYAMIDE |
| LEVERS: | STAINLESS STEEL |

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: $\pm 1/64$
ANGULAR: MACH $\pm 5^\circ$ BEND $\pm 5^\circ$
TWO PLACE DECIMAL $\pm .01$
THREE PLACE DECIMAL $\pm .004$



MATERIAL
FINISH
DO NOT SCALE DRAWING

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS

| | |
|---------------------------|---------------------------------|
| VOLTS: | 125V |
| AMPS: | 3A |
| SCCR: | 0.2kA |
| NEMA/UL EN 60529: | 4, 4X, 12 IP65 |
| MOUNTING SCREW SIZE: | M4 (8-32) (304 or 316SS for 4X) |
| MOUNTING SCREW TORQUE: | 1.2~1.8N-m (0.9~1.3 Lb-Ft) |
| INCOMING POWER WIRE SIZE: | 0.5~4.0 sq mm / 20-12AWG |
| WIRE STRIP LENGTH: | 10~11 mm |

MENCOM CORPORATION

TITLE:
DP-RJ45S-USB-BFAF-R-32

SIZE DWG. NO. REV
B DP-RJ45S-USB-BFAF-R-32 B
SCALE: 2:3 WEIGHT: SHEET 1 OF 1