



PANEL CUTOUT

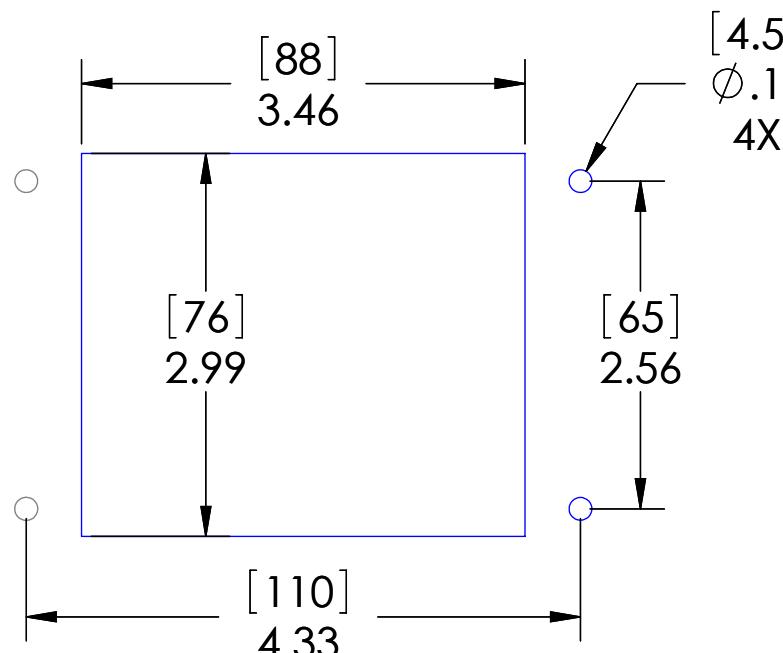

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK
ALL D-SUBS	FEMALE	MALE

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.



HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

UNLESS OTHERWISE SPECIFIED:	
DRAWN BY	DCG
DRAWN DATE	06/13/2019
CHECKED BY	GO
CHECK DATE	06/13/2019

MATERIAL

DO NOT SCALE DRAWING

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS		
VOLTS:	125V	
AMPS:	3A	
SCCR:	0.2kA	
NEMA/UL EN 60529:	4, 4X, 12 IP65	
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)	
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)	
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG	
WIRE STRIP LENGTH:	10 ~ 11 mm	

MENCOM CORPORATION

TITLE:
DP1; 2DB9; RJ45; 3A; 32

SIZE DWG. NO.
B DP1-2DB9-RJ45-R-32 REV
E
SCALE: 2:3 WEIGHT:
SHEET 1 OF 1