


PANEL CUTOUT

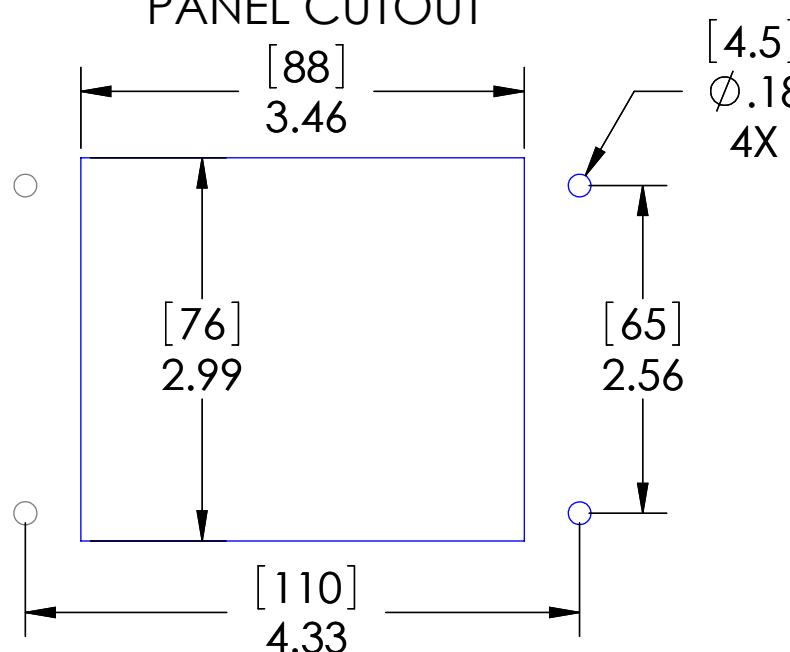

For power connector, crimp termina are supplied for hot and neutral connection. Ground wire supplied with an M3 ring terminal applied to end of 6" ground lead.

PART NUMBER	LENGTH "L"
DP1-2RJ45-2USB-03-32	3 FEET
DP1-2RJ45-2USB-06-32	6 FEET
DP1-2RJ45-2USB-10-32	10 FEET

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	15A
SCCR:	10kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]

DRAWN BY DCG
DRAWN DATE 06/05/2019
CHECKED BY GO
CHECK DATE 06/05/2019
COMMENTS:
MATERIAL
FINISH
DO NOT SCALE DRAWING

MENCOM CORPORATION

TITLE:
CC;SMPLX;2 RJ;2USB W/3FT;32

SIZE DWG. NO.
B DP1-2RJ45-2USB-ZZ-32
REV **C**
SCALE: 2:3 WEIGHT:
SHEET 1 OF 1

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

DO NOT SCALE DRAWING