



8 7 6 5 4 3 2 1

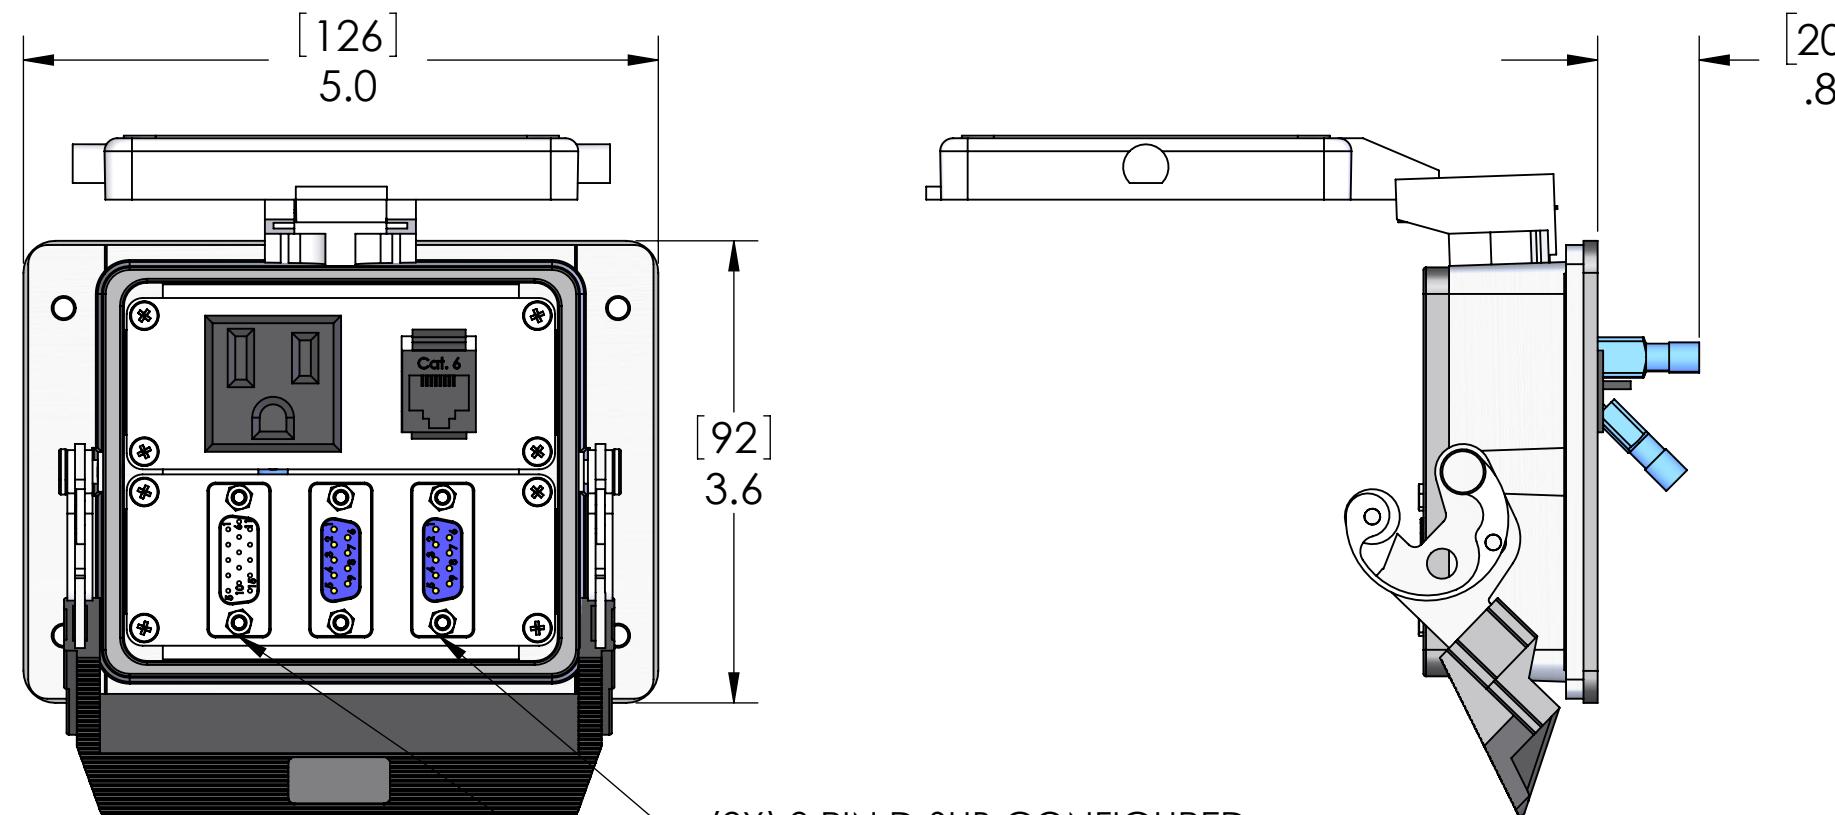

(2X) 9 PIN D-SUB CONFIGURED
FEMALE EXTERIOR/MALE INTERIOR
15 PIN HI DEN D-SUB (VGA) CONFIGURED
FEMALE EXTERIOR/MALE INTERIOR

PANEL CUTOUT

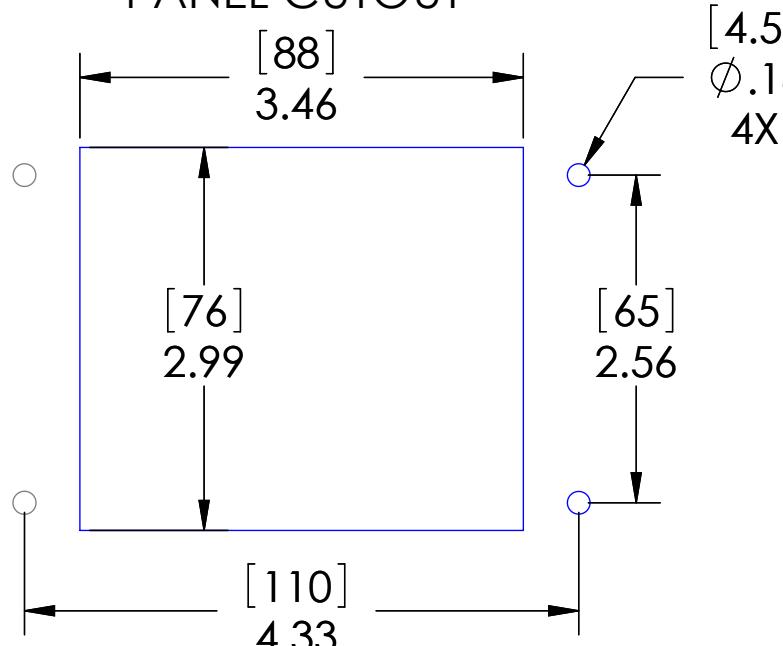


For power connector, crimp terminals
are supplied for hot, neutral and
ground connections.

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

OPERATING TEMPERATURE: (-10°C / +60°C (+14°F / +140°F))

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]

DRAWN BY DCG
DRAWN DATE 07/12/2021
CHECKED BY DCG
CHECK DATE 07/13/2021

REVISIONS:

MATERIAL
FINISH

DO NOT SCALE DRAWING

A device employing a 15 A or 20 A grounding type receptacle but no supplementary
protector shall be protected by a fuse or circuit breaker that does not exceed the marked
rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the
receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere
rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and
thickness and with adequate spacing provided. Seal rating is based on
mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS

VOLTS:	125V
AMPS:	15A
SCCR:	10kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

MENCOM CORPORATION

TITLE:
SMPLX; DDB15; 2DB9; RJ45; 32

SIZE DWG. NO.
B DP1-DDB15-2DB9-RJ45-32
REV **C**
SCALE: 2:3 WEIGHT:
SHEET 1 OF 1