


UNITED KINGDOM RECEPTACLE (BS 1363A)

PANEL CUTOUT

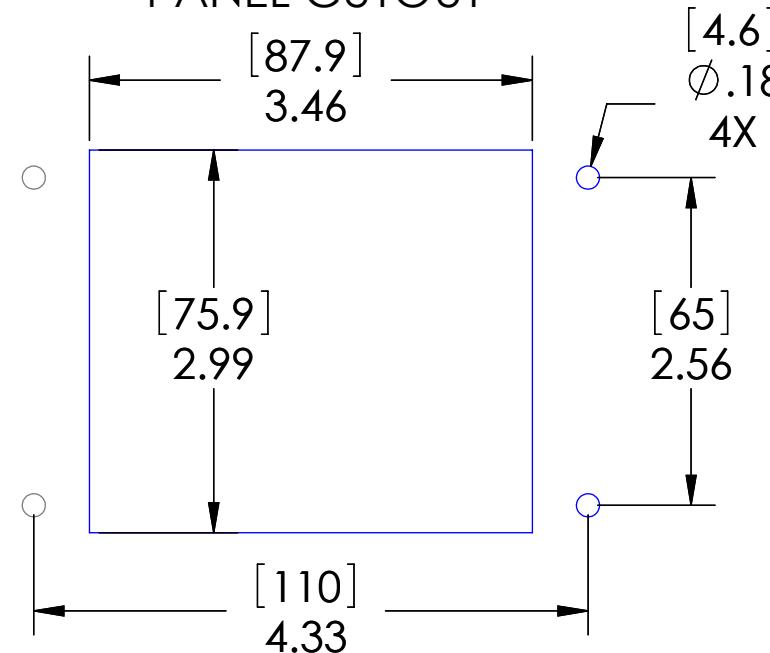

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
ALL D-SUBS	FEMALE	MALE
RJ45	CAT 6 JACK	CAT 6 JACK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

OPERATING TEMPERATURE: (-5°C / +50°C (+23°F / +122°F))

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

DRAWN BY ADM
DRAWN DATE 08/09/2024
CHECKED BY DCG
CHECK DATE 08/09/2024

MATERIAL
FINISH

COMMENTS:
DO NOT SCALE DRAWING

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS

VOLTS:	250V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N·m (0.9~1.3 Lb·Ft)
INCOMING POWER WIRE SIZE:	0.5~4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10~11 mm

MENCOM CORPORATION

TITLE:
UK RCP;9 PIN DSUB;RJ;3A;32

SIZE DWG. NO. REV
B DUK-DB9-RJ45-R-32 C
SCALE: 2:3 WEIGHT: SHEET 1 OF 1