
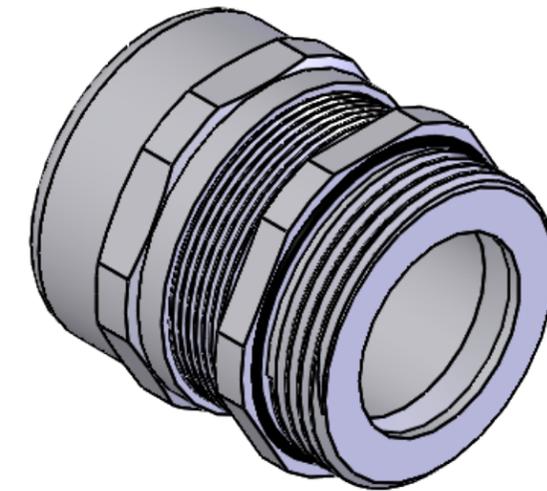
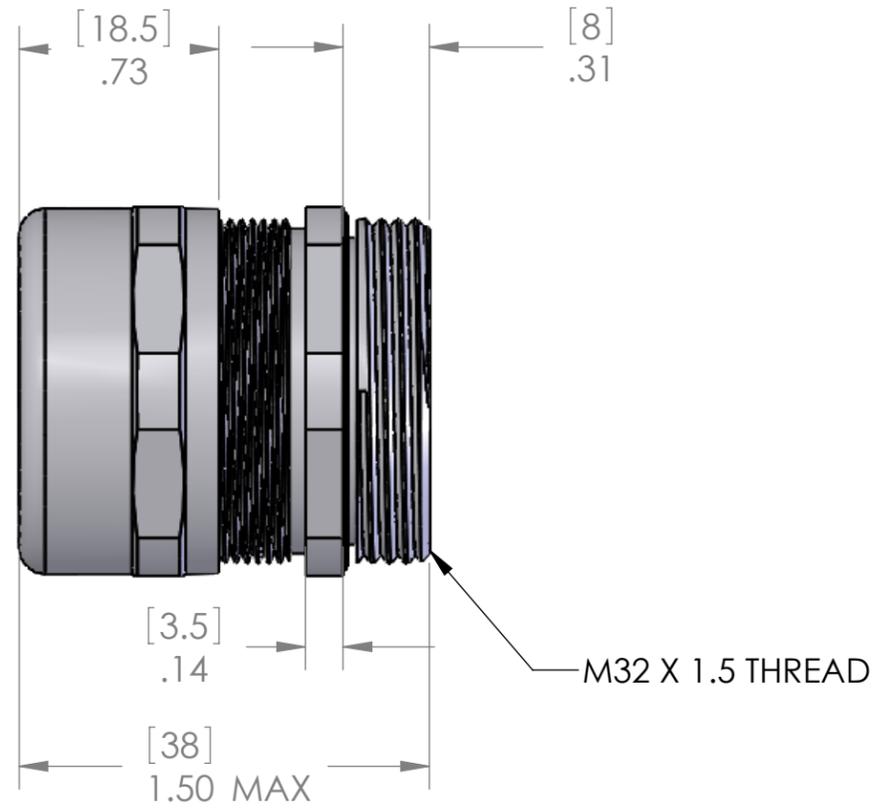


Revisions			
REV.	DESCRIPTION	DATE	DRAWN BY
A	ORIGINAL SHEET	1/26/2024	DCG
B	UPDATED SEALING RANGE	1/26/2024	DCG

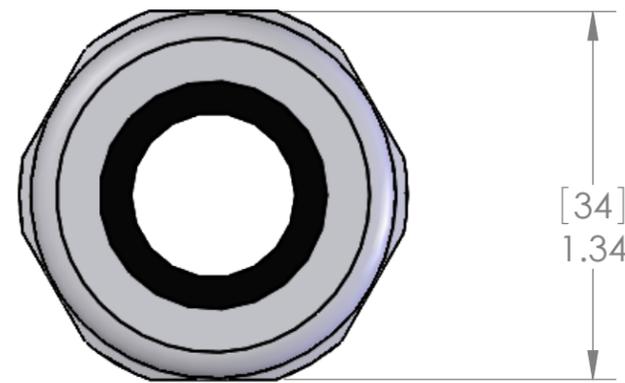

SEALING RANGE: .551 - .787(14-20 MM)
 SEAL RATED TO: IP68
 RECOMMENDED HOLE: 32.5MM

MATERIALS:	
BODY:	STAINLESS STEEL
INSERT:	POLYAMIDE
GROMMET:	CR/NBR
O-RING:	NBR
SPECIFICATIONS:	
TEMPERATURE:	-20°C - +100°C
APPROVALS:	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	DCG
	DRAWN DATE	01/26/2024
	CHECKED BY	DWM
	CHECK DATE	01/26/2024
COMMENTS:		
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MCG-M32-SS	B
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1