


8 7 6 5 4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN NEW CAD	12/2/2004	
B	TABLES ADDED	6/1/2006	

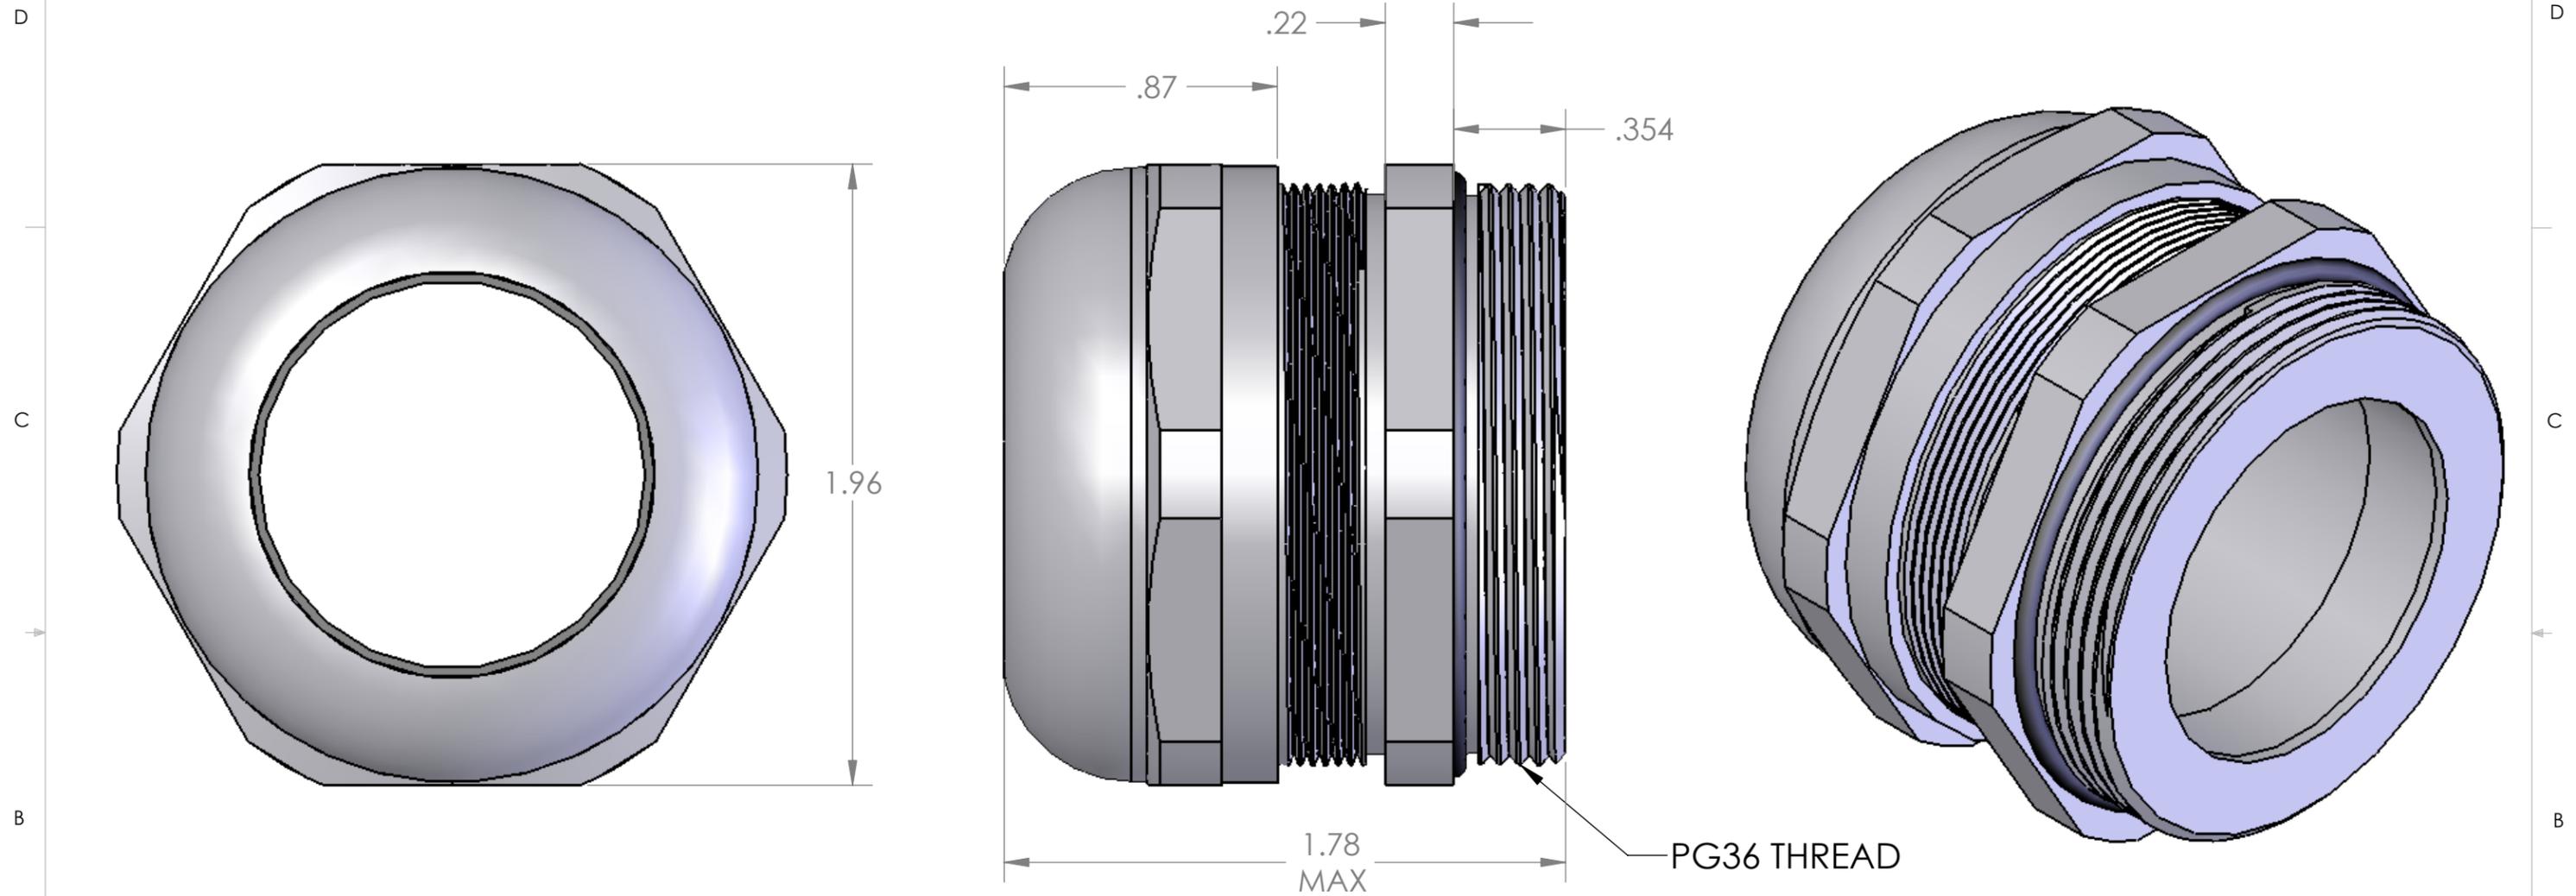

LOCK NUT INCLUDED BUT NOT SHOWN

SEAL RATED AT IP 68

SPECIFICATIONS:	ⓑ
TIGHTENING TORQUE:	10 Nm
TEMPERATURE:	-20°C - +100°C

PART NUMBER	SEALING RANGE
ⓑ MCGB-36	.945 - 1.26 [24 - 32 mm]
MCGB-36R	.787 - 1.02 [20 - 26 mm]

MATERIALS:	
BODY:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
GROMMET:	NEOPRENE
LOCK NUT:	NICKEL PLATED BRASS
O-RING:	BUNA-N

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	NAME
DIMENSIONS ARE IN INCHES	BEM
	DRAWN
	CHECKED
	ENG APPR.
	MFG APPR.
	Q.A.
	COMMENTS:
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MCGB-36	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

8 7 6 5 4 3 2 1