
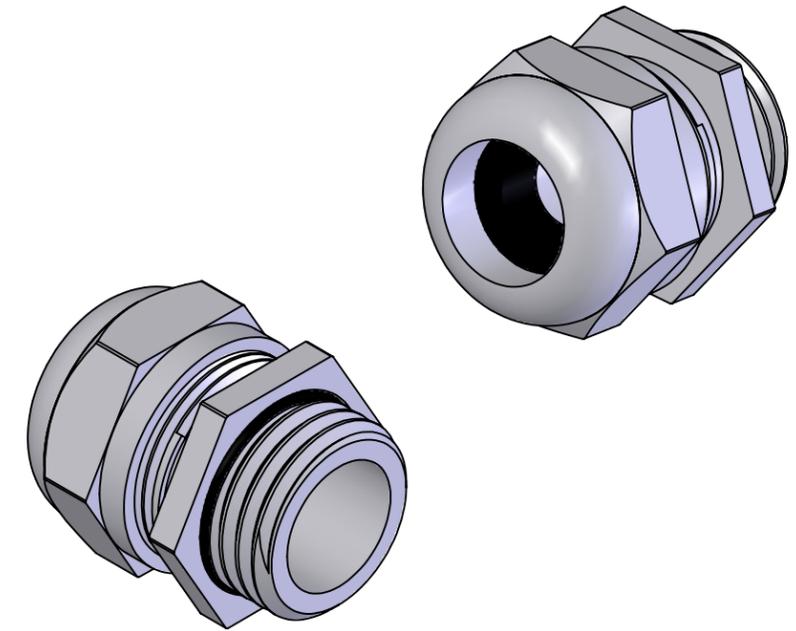
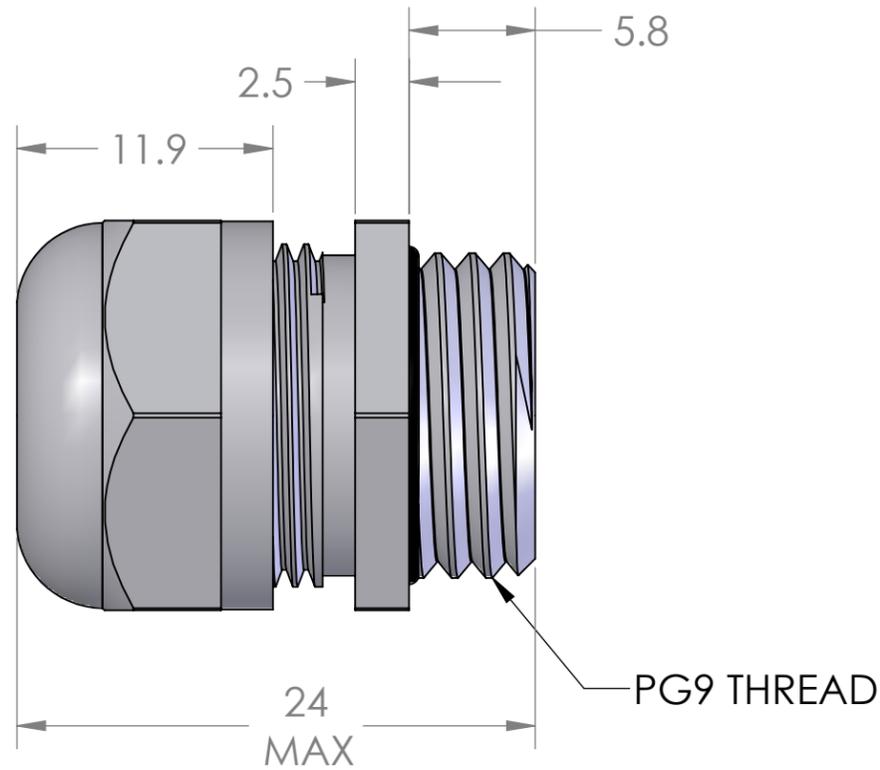


Revisions			
REV.	DESCRIPTION	DATE	DRAWN BY
A	RELEASED	9/25/2019	DCG

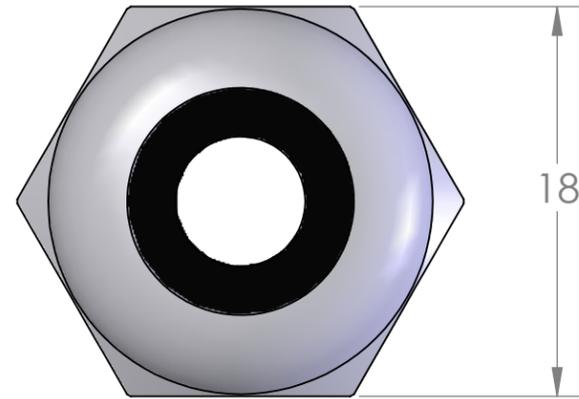

LOCK NUT INCLUDED BUT NOT SHOWN

SEAL RATED TO: IP 65

**SPECIFICATIONS:**

**TIGHTENING TORQUE:** 6.25 Nm

**TEMPERATURE:** -30°C - +110°C

**MATERIALS:**

<b>BODY:</b>	NICKEL PLATED BRASS
<b>INSERT:</b>	POLYAMIDE
<b>GROMMET:</b>	NEOPRENE
<b>LOCK NUT:</b>	NICKEL PLATED BRASS
<b>O-RING:</b>	BUNA-N

PART NUMBER	SEALING RANGE
<b>MCGW-09</b>	<b>.197 - .394 [5 - 10 MM]</b>

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MM  
 TOLERANCES:  
 FRACTIONAL ± 1/64  
 ANGULAR: MACH ± 3° BEND ± 5°  
 ONE PLACE DECIMAL ± .2  
 TWO PLACE DECIMAL ± .1

DRAWN BY	DCG
DRAWN DATE	09/25/2019
CHECKED BY	JJH
CHECK DATE	09/25/2019

**MENCOM CORPORATION**  
 TITLE:  
 PG9 METAL CBL GLND 5 - 10MM

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

COMMENTS:

SIZE	DWG. NO.	REV
<b>B</b>	MCGW-09	<b>A</b>
SCALE: 3:1	WEIGHT:	SHEET 1 OF 1