
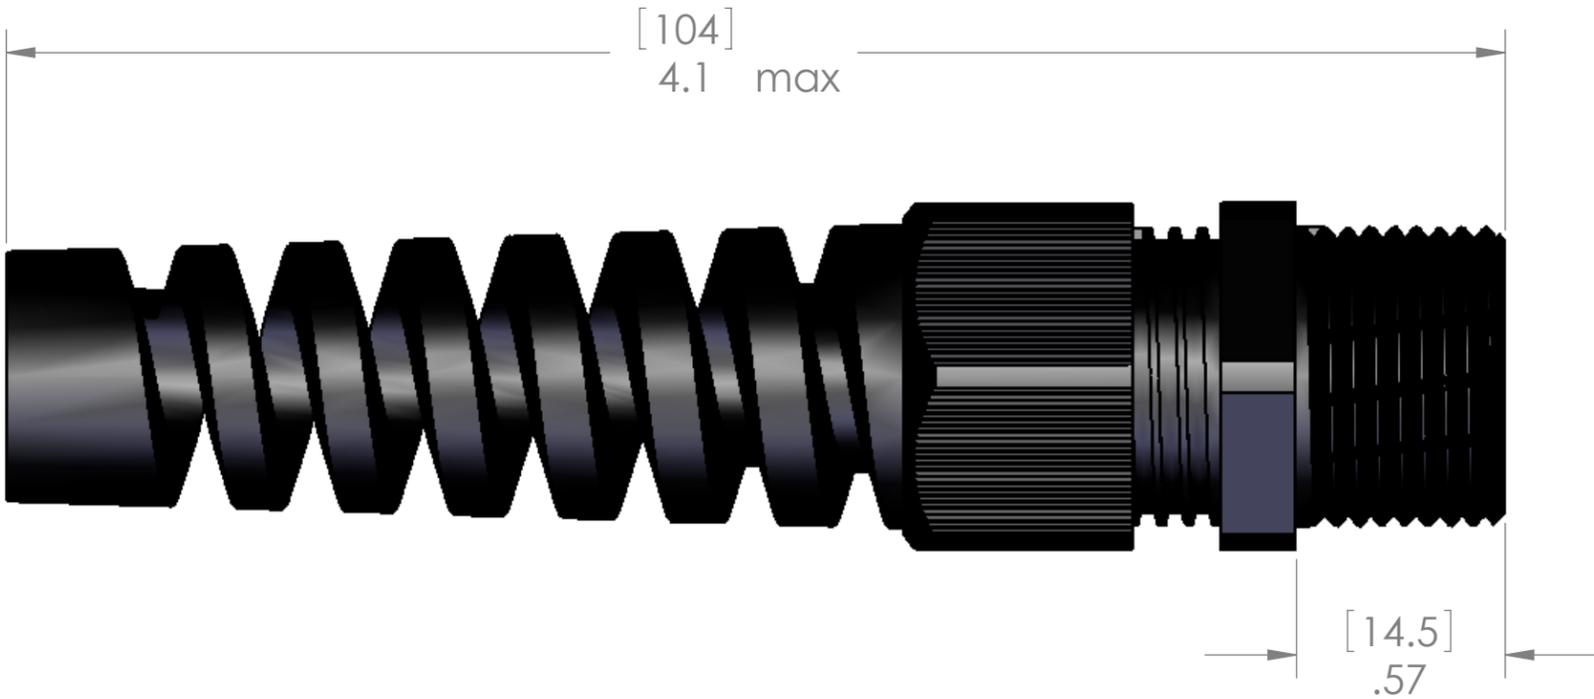


REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	4/7/2010

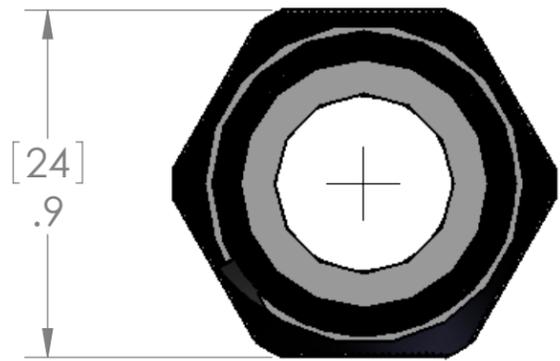

LOCK NUT NOT INCLUDED BUT CAN BE ORDERED SEPARATELY

NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL. CRUSH RIBS ON THE UNDERSIDE OF HEX WILL PROVIDE THE SEAL.

SEALING RANGE: .197 - .354 (5 - 9 MM)
SEAL RATED TO: IP68

MATERIALS	
BODY:	BLACK POLYAMIDE
GROMMET:	NEOPRENE

SPECIFICATIONS:	
TIGHTENING TORQUE:	3.75 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

SPECIFICATIONS	
DO NOT SCALE DRAWING	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES & [MM]	DRAWN	NAME
	CHECKED	BEM
	ENG APPR.	
	MFG APPR.	
	Q.A.	
	COMMENTS:	
MATERIAL		
FINISH		

MENCOM CORPORATION		
TITLE: 1/2 NPT CABLE GLAND WITH FLEX TOP		
SIZE	DWG. NO.	REV
B	PCG-12X-BS	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1