
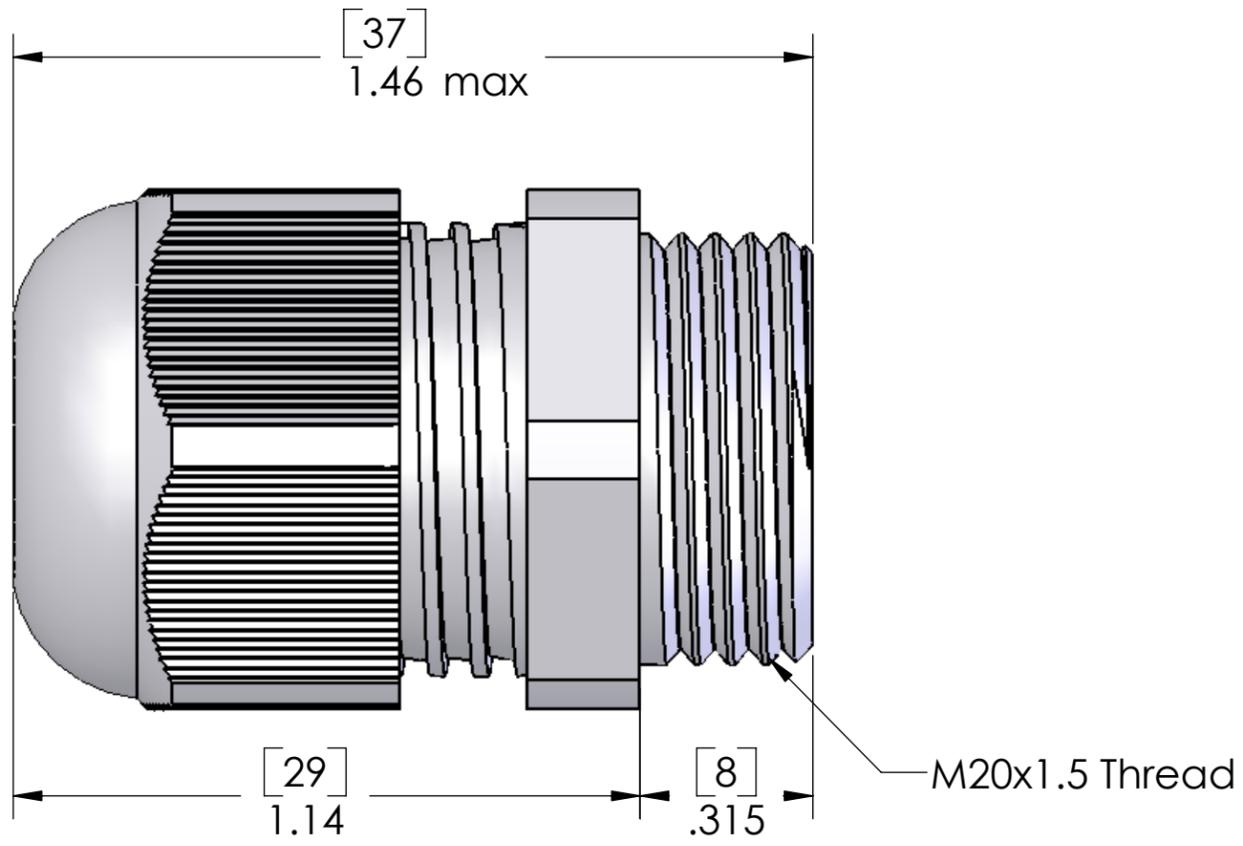


REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	2/25/2005

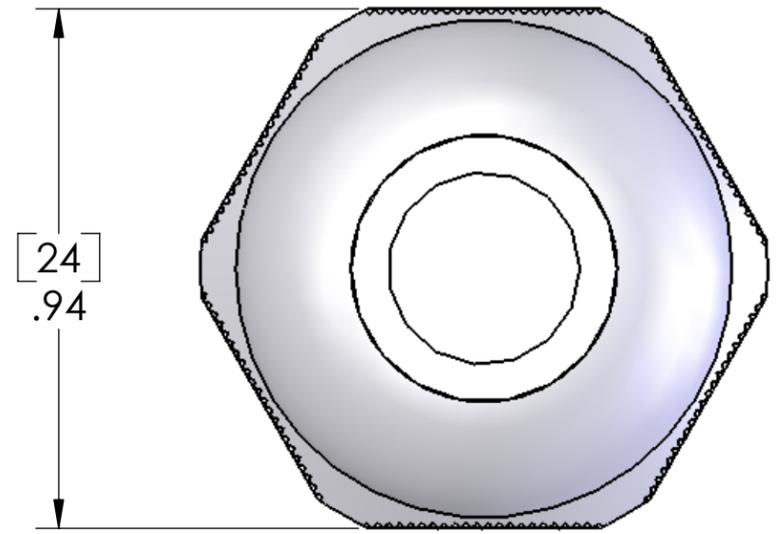

2M20PA LOCK NUT INCLUDED BUT NOT SHOWN  
 NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL. CRUSH RIBS ON THE UNDERSIDE OF HEX WILL PROVIDE THE SEAL.

<b>MATERIALS</b>	
<b>BODY:</b>	<b>GRAY POLYAMIDE</b>
<b>GROMMET:</b>	<b>NEOPRENE</b>

<b>SPECIFICATIONS:</b>	
<b>TIGHTENING TORQUE:</b>	<b>3.75 Nm</b>
<b>TEMPERATURE:</b>	<b>-20°C - +100°C</b>

<b>APPROVALS:</b>	
<b>US</b>	<b>UL RECOGNIZED</b>
<b>CANADA</b>	<b>C-UL RECOGNIZED</b>

PART NUMBER	COLOR	SEALING RANGE
<b>PCG-M20R</b>	<b>GRAY</b>	<b>5-9mm</b>
<b>PCG-M20R-B</b>	<b>BLACK</b>	<b>5-9mm</b>

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	NAME BEM
MATERIAL	DRAWN
FINISH	CHECKED
	ENG APPR.
	MFG APPR.
	Q.A.
	COMMENTS:

MENCOM CORPORATION		
TITLE:		
SIZE <b>B</b>	DWG. NO. PCG-M20R	REV <b>A</b>
SCALE: 3:1	WEIGHT:	SHEET 1 OF 1

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

SPECIFICATIONS	DO NOT SCALE DRAWING
----------------	----------------------