



12345678

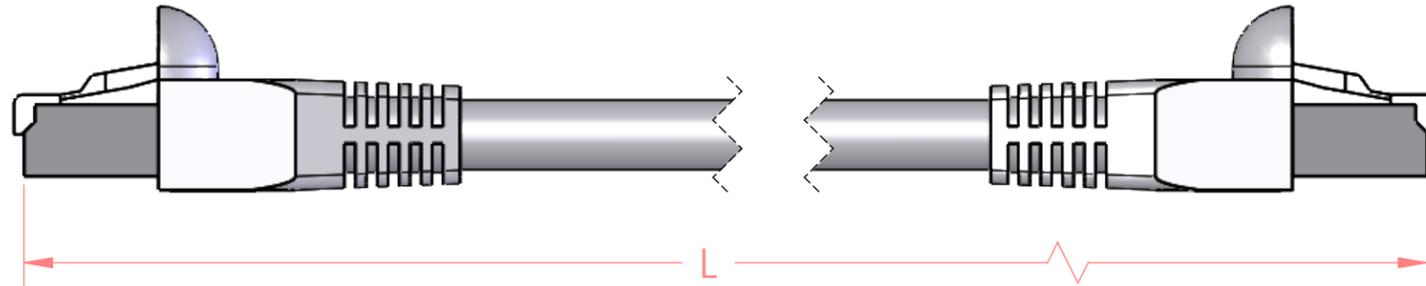

12345678

Category 5e 350 MHz Shielded cables per TIA/EIA-568-B.2-10.

Cable: 4 Pr 24AWG with foil shield and drain, gray PVC jacket.

RoHS Compliant

<b>RJ45S-IC-03-GY</b>	<b>36" [0.9m]</b>
<b>RJ45S-IC-07-GY</b>	<b>84" [2.1m]</b>
<b>RJ45S-IC-10-GY</b>	<b>120" [3.0m]</b>
<b>RJ45S-IC-14-GY</b>	<b>168" [4.3m]</b>
<b>RJ45S-IC-25-GY</b>	<b>300" [7.6m]</b>
<b>RJ45S-IC-50-GY</b>	<b>600" [15.2m]</b>
<b>RJ45S-IC-75-GY</b>	<b>900" [22.9m]</b>
<b>RJ45S-IC-100-GY</b>	<b>1200" [30.5m]</b>

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	JJH
	DRAWN DATE	05/21/2019
	CHECKED BY	ADM
	CHECK DATE	05/21/2019
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 4 PR CAT 5e SHLDD EXT CBL		
SIZE	DWG. NO.	REV
<b>B</b>	RJ45S-IC-ZZ-GY	<b>A</b>
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1