

P | Cabling

Data sheet

OpDAT REGpro Connect for 12 splice connections with crimp splice holder

Page 1/4

P/N

15024A00000-E

EAN 4251394634753


2023/04/26

Version: E

Illustrations



Dimensional drawing

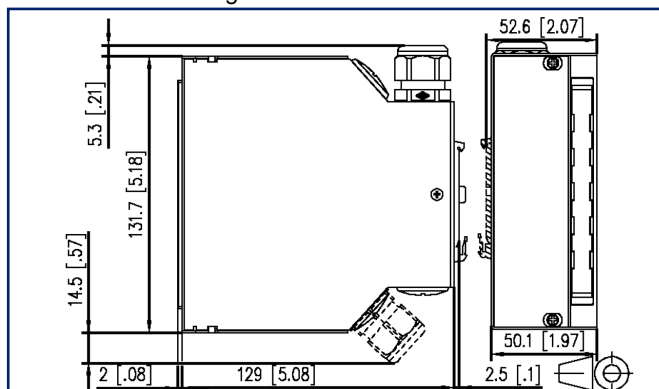

See enlarged drawings at the end of document

Product specification

- Compact distributor housing for TH35 top hat rail systems
- suitable for connecting a maximum of 2 installation cables
- compact connection of installation cables e.g. for extending a connection or displacing distribution cabinets
- housing with mounted blind plate and splice tray
- Front area with identification strips
- Various mounting positions on the top hat rail system possible
- Cable insertion from above or below, straight or inclined, suitable for M20 strain relief
- two cable glands M20 with strain relief included in the delivery
- unoccupied adapter recesses are closed with blind plugs



P | Cabling

Data sheet

Page 2/4

OpDAT REGpro Connect for 12 splice connections with crimp splice holder

P/N

15024A00000-E

EAN 4251394634753

2023/04/26

Version: E

Technical Data

General Data

Fields of application	structured building cabling office areas harsh environment
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	Splice distributor - connect
Mounting style	Standard rail TH35
Transmission technology	Fiber optic
Color	gray
Dimensions	
Dimension (L x W x H)	133.5 mm x 140 mm x 50 mm
Dimension (L x W x H)	5.256 in. x 5.512 in. x 1.969 in.
Height unit	3RU
Horizontal pitch	7HP
Labeling option	label strip / labeling strip

Connections/interfaces

Cable access/outlet	from top or bottom, straight or inclined
---------------------	--

Mechanical data

strain relief	M gland
---------------	---------

Materials and material properties

Material - Housing	sheet steel
Material - Housing finish	powder-coated
Material - Assembly housing	sheet steel
Material - Front cover	sheet steel
Material - Front cover finish	powder-coated
Halogen free	yes
RoHS	compliant



P | Cabling

Data sheet

Page 3/4

OpDAT REGpro Connect for 12 splice connections with crimp splice holder

P/N

15024A00000-E

EAN 4251394634753

2023/04/26

Version: E

Technical Data

Classifications	
ETIM 5.0	EC001130
ETIM 6.0	EC001130
ETIM 7.0	EC001130
ETIM 8.0	EC001130
ETIM 9.0	EC001130



P | Cabling

Data sheet

Page 4/4

OpDAT REGpro Connect for 12 splice connections with crimp splice holder

P/N

15024A00000-E

EAN 4251394634753

2023/04/26

Version: E

Illustrations

Dimensional drawing

