


Data sheet

OpDAT fix patch panel for 24xSC-Duplex/LC-Quad/ST-Duplex

Illustrations



Dimensional drawing

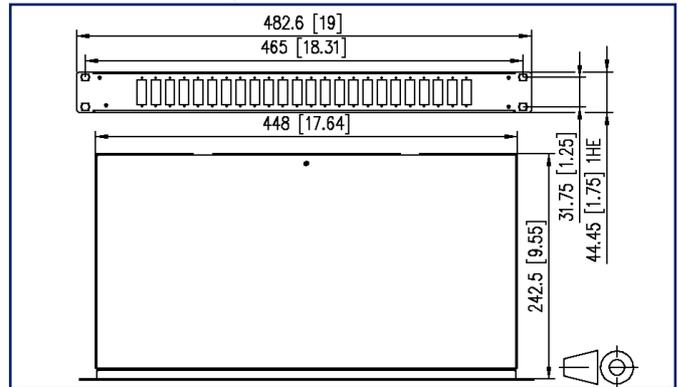

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- unequipped
- light aluminum construction with steel sheet front plate painted (gray or black)
- removable front plate for easy adapter mounting
- screwed on cover for easy access during service work
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)

variants:	matching cutouts
24x LC-D	LC-D, SC-S, E2000-S
24x SC-D	SC-D, LC-Q, ST-D
24x E2000-D	E2000-D

P | Cabling

Data sheet

Page 2/6

OpDAT fix patch panel for 24xSC-Duplex/LC-Quad/ST-Duplex

P/N

150250B200-E

EAN 4250184125006

2023/08/01

Version: X

Technical Data

General Data

Fields of application	office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	patch panel
Mounting style	1RU
Color	gray
Dimensions	
Dimension (L x W x H)	242.5 mm x 482.6 mm x 44.45 mm
Dimension (L x W x H)	9.547 in. x 19 in. x 1.75 in.
Inches	19 inches
Height unit	1RU
Installation depth	240 mm
Installation depth	9.449 in.
Labeling option	printed numbers

Connections/interfaces

Number of ports interface 1	24
Number of equipped ports interface 1	0
Number of ports interface 2	24
Number of ports interface 2 equipped	0
Cable access/outlet	straight from the left and right on the rear

Mechanical data

Cut-out	SC-D, LC-Q, ST-D
---------	------------------

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	sheet steel
Material - Cover	Al (Aluminium)
Halogen free	yes
RoHS	compliant

P | Cabling

Data sheet

Page 3/6

OpDAT fix patch panel for 24xSC-Duplex/LC-Quad/ST-Duplex

P/N

150250B200-E

EAN 4250184125006

2023/08/01

Version: X

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C -40 °C - 70 °C

Temperature - Storage °F -40 °F - 158 °F

Temperature - Operating °C -40 °C - 70 °C

Temperature - Operating °F -40 °F - 158 °F

Classifications

ETIM 5.0 EC001130

ETIM 6.0 EC001130

ETIM 7.0 EC002006

ETIM 8.0 EC002006

ETIM 9.0 EC002006

Packing details

Type of packaging 1 pc(s) / box

Packaging unit - Weight (gram) 1400 g

Packaging unit - Weight (pound) 3.09 lb

Packaging dimension 580 mm x 405 mm x 70 mm

Packaging dimension 22.835 in. x 15.945 in. x 2.756 in.

OpDAT fix patch panel for 24xSC-Duplex/LC-Quad/ST-Duplex

P/N

150250B200-E

EAN 4250184125006

2023/08/01

Version: X

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
1502500000-E	OpDAT PF/fix patch cord tray, gray
15081106-E	OpDAT mounting plate VIK
150811M20-E	Cable gland M20 (Clamping range 7.0 to 12.0 mm)
150811M25-E	Cable gland M25 (Clamping range 10.0 to 16.0 mm)
15090041-I	OpDAT ST-D Kupplung MM (Ph-Br, metallisch)
15090051-I	OpDAT ST-D adapter MM (ceramic, metallike)
15090052-30	OpDAT adapter SC-Duplex OM2 (metal) - 30 pieces
15090052-I	OpDAT adapter SC-Duplex OM2 (metal)
15090053-I	OpDAT ST-D/SC-D adapter MM (ceramic, metallike)
15090071-30	OpDAT adapter LC-Quad OS2 - 30 pieces
15090071-I	OpDAT adapter LC-Quad OS2
15090072-I	OpDAT LC-Q Kupplung MM (Ph-Br, beige)
15090078-30	OpDAT adapter LC-Quad OM3 - 30 pieces
15090078-I	OpDAT adapter LC-Quad OM3
15090079-30	OpDAT adapter LC-Quad OM4 - 30 pieces
15090079-I	OpDAT adapter LC-Quad OM4
1509007A-30	OpDAT adapter LC-Quad APC OS2 - 30 pieces
1509007A-I	OpDAT adapter LC-Quad APC OS2
150900B2-30	OpDAT adapter SC-Duplex OM2 - 30 pieces
150900B2-I	OpDAT adapter SC-Duplex OM2
150900BA-30	OpDAT adapter SC-Duplex OM3 - 30 pieces
150900BA-I	OpDAT adapter SC-Duplex OM3
150900BB-30	OpDAT adapter SC-Duplex OM4 - 30 pieces
150900BB-I	OpDAT adapter SC-Duplex OM4
150900C2-I	OpDAT SC-D Kupplung MM (Ph-Br, metallisch)
150900C3-I	OpDAT SC-D/ST-D Kupplung MM (Ph-Br, metallisch)
150900D2-30	OpDAT SC-D adapter OS2 (metallike+blue) - 30 pieces
150900D2-I	OpDAT adapter SC-Duplex OS2 (metal)
150900D3-30	OpDAT adapter ST/SC-Duplex OS2 - 30 pieces
150900D3-I	OpDAT adapter ST/SC-Duplex OS2
150900D4-30	OpDAT SC-D APC adapter OS2 (metallike+green)- 30 pieces
150900D4-I	OpDAT SC-D APC adapter OS2 (metallike+green)

OpDAT fix patch panel for 24xSC-Duplex/LC-Quad/ST-Duplex

P/N

150250B200-E

EAN 4250184125006

2023/08/01

Version: X

Accessories

150900E2-30	OpDAT adapter SC-Duplex OS2 - 30 pieces
150900E2-I	OpDAT adapter SC-Duplex OS2
150900F2-30	OpDAT adapter SC-Duplex APC OS2 - 30 pieces
150900F2-I	OpDAT adapter SC-Duplex APC OS2
1509010000-E	OpDAT splice tray for 12 splices, unequipped
150922EO00-E	OpDAT pre-assembled splice tray 12xSC PC OM2
150925EO00-E	OpDAT pre-assembled splice tray 12xSC PC OM3
150929EO00-E	OpDAT pre-assembled splice tray 12xSC UPC OS2

P | Cabling

Data sheet

Page 6/6

OpDAT fix patch panel for 24xSC-Duplex/LC-Quad/ST-Duplex

P/N

150250B200-E


EAN 4250184125006

2023/08/01

Version: X

Illustrations

Dimensional drawing

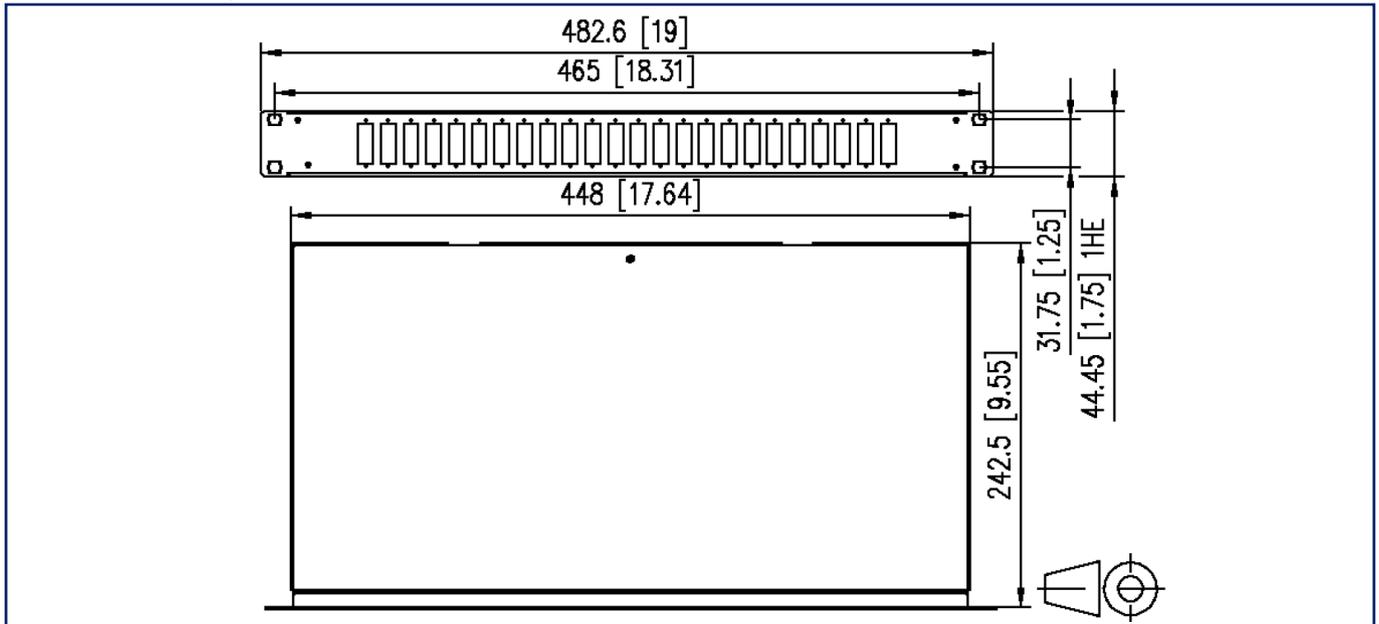

© 2023 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!