

P | Cabling

Data sheet

OpDAT adapter E2000-Simplex OS2

Page 1/5

P/N


1509005M-I

EAN 4251394608297


2023/04/06

Version: F


Illustrations

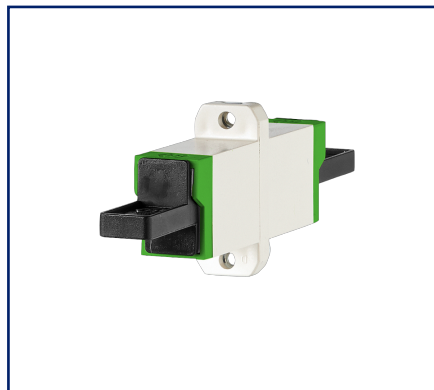

Dimensional drawing

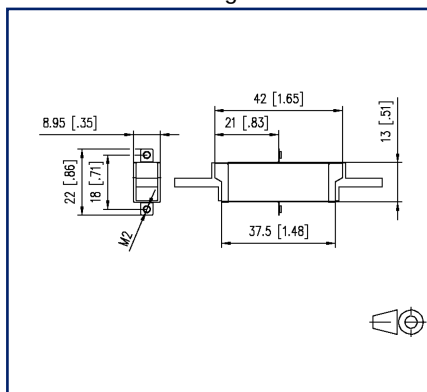

Drill pattern

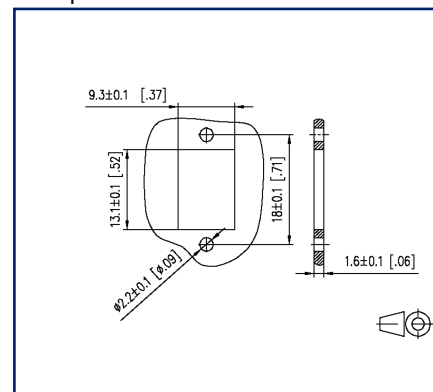

See enlarged drawings at the end of document

Product specification

- housing of the E2000 adapter made of plastic, screws included in the delivery
- slotted sleeve made of ceramics
- high material stability and surface quality and long service life
- service life: min. 1000 plug cycles
- variants: blue (SM), green (SM APC), beige-green (OM5), beige-violet (OM4) or beige-aqua (OM3)



P | Cabling

Data sheet

Page 2/5

OpDAT adapter E2000-Simplex OS2

P/N

1509005M-I

EAN 4251394608297

2023/04/06

Version: F

Technical Data

General Data

Fields of application	structured building cabling fiber to the desk data center
Design	coupler / adapter (FO)
Transmission technology	Fiber optic
Color	beige-green
Dimensions	
Dimension (L x W x H)	42 mm x 8.95 mm x 22 mm
Dimension (L x W x H)	1.654 in. x 0.352 in. x 0.866 in.
Mode type of the fiber	Multimode
Labeling option	on housing

Connections/interfaces

Connector technology interface 1	E2000
Connector technology interface 2	E2000
Number of ports interface 1	1
Number of ports interface 2	1
Number of equipped ports interface 1	1
Number of ports interface 2 equipped	1
Number of ports with dust protection interface 1	1
Number of ports with dust protection interface 2	1

Mechanical data

Cut-out	SC, LC-D, E2000
Mounting method	screwable
Life - Number of mating cycles	min. 1000
Position/mounting of latch standard installation position	top

Materials and material properties

Material - Housing	Plastics
Material - Sleeve	ceramic, slotted
Halogen free	yes
RoHS	compliant



P | Cabling

Data sheet

Page 3/5

OpDAT adapter E2000-Simplex OS2

P/N

1509005M-I

EAN 4251394608297

2023/04/06

Version: F

Technical Data

Standards/Regulations

Fibre optic connector interfaces	IEC 61754-15
----------------------------------	--------------

Classifications

ETIM 7.0	EC000752
----------	----------

ETIM 8.0	EC000752
----------	----------

Packing details

Type of packaging	1 pc(s) / plastic bag
-------------------	-----------------------

Packaging unit - Weight (gram)	14 g
--------------------------------	------

Packaging unit - Weight (pound)	0.03 lb
---------------------------------	---------

Packaging dimension	380 mm x 160 mm x 100 mm
---------------------	--------------------------

Packaging dimension	14.961 in. x 6.299 in. x 3.937 in.
---------------------	------------------------------------

P | Cabling

Data sheet

Page 4/5

OpDAT adapter E2000-Simplex OS2

P/N

1509005M-I

EAN 4251394608297

2023/04/06

Version: F

Accessories from

P/N	Designation
14040000-E	MCO IP69k protective housing for outdoor use, set for exposed installation
14040010-E	MCO IP69k Protective housing for outdoor use, set with mounting bracket
14040100-E	MCO IP69k Protective housing for outdoor use, set wall/ housing bushing



P | Cabling

Data sheet

OpDAT adapter E2000-Simplex OS2

Page 5/5

P/N

1509005M-I


EAN 4251394608297

2023/04/06

Version: F

Illustrations

Dimensional drawing

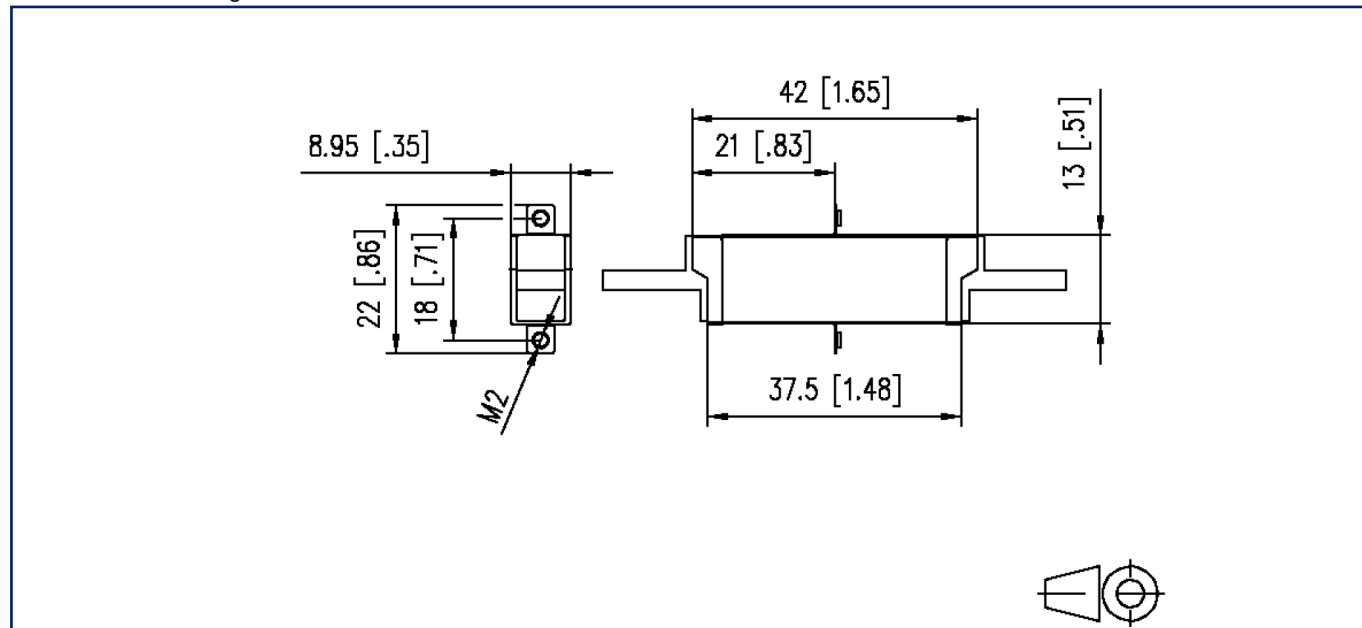

Drill pattern

