

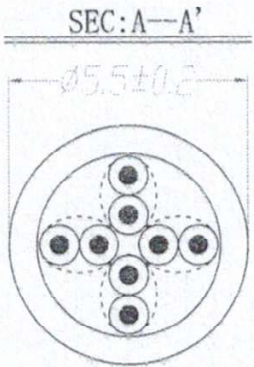


NOTE: ALL MATERIAL MUST COMPLIANT RoHS STANDARD

REV.	PCN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN

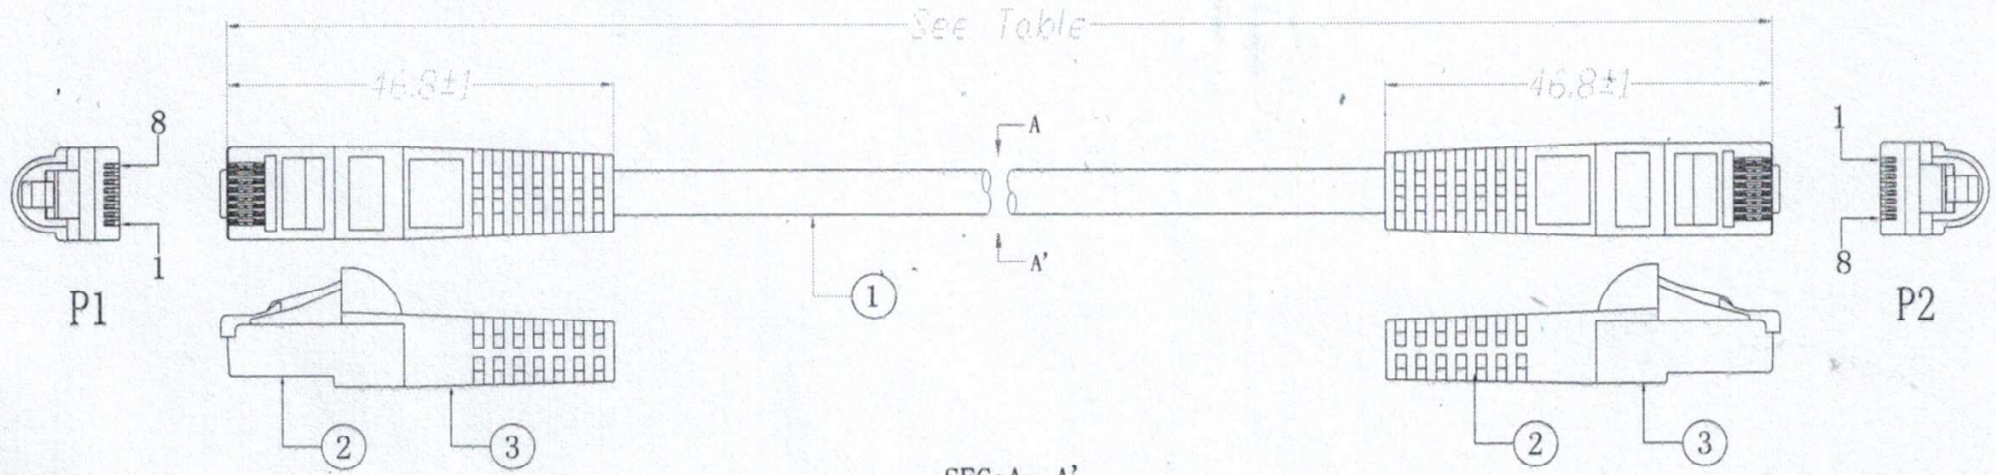

WIRING

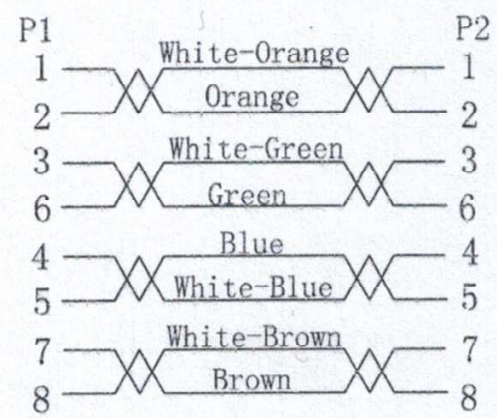

- ELECTRICAL TEST:
- 1) 100% Open Short & Miss Wire Test.
 - 2) Insulation impedance: 20MΩ MIN (300DC/0.01s).
 - 3) Conduction impedance: 3Ω MAX.

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'	Y	UN.
③	Molding	60P PVC, Colour (Pantone NO.: 2925C Blue)	13		g
②	8P8C PLUG	8P8C PLUG Pin Gold Plated	2		pcs
①	Cable	CAT5E UTP [24AWG (7/0.19BC) *4P Jacket: PVC OD 5.5mm H70° 2925C Blue Marking: CAT5E UTP TYPE CM 24AWG NETWORK CABLE + METER			mm

Drawing NO. 943-0081		Revision A-0	
Title 品名: CAT5E UTP CABLE 2925C Blue			
Customer 客户: XLM61	Customer P/N 客户料号: See Table		
Design 设计:	Item NO.:	Date 日期: 2016.06.01	Tolerance 公差: .XX(0.01)
Check 审查:	Approved 核准:	Units 单位: mm	3DR
		Page 页数: 1/1	